



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Full body micro silhouette makes a bold statement with a minimal design in post painted matte white finish (consult factory for other finishes). Scaled to the LED module the frosted diffuser surrounds the LEDs for a soft lighting. Fixture can be surface mounted on the wall or ceiling or pendant mounted with specially engineered cable mounting kit.

FEATURES & BENEFITS

- Housing is formed and welded 22 gauge steel, that is chemically treated and powder coated for a beautiful finish and to resist corrosion
- Can be mounted individually or in a continuous row
- Ribbed frosted lens is standard
- Knockouts on back and ends accept standard electrical fittings (by others). Consult factory.
- Surface mountable to a wall or ceiling
- Pendant or cable mountable
- Whips, fuses and cord sets. See options page in Buyers' Guide or contact the factory for more.
- $cETL_{US}$ listed for damp locations



OCCUPANCY SENSOR

- Self-Contained Relay
- No Power Pack Needed
- No Minimum Load
- Requirements Interchangeable
- Hot & Load Wires, Impossible to Wire Backwards Push-Button Programmable
- Adjustable Time Delays
- No Field Calibration or Sensitivity Adjustments Required
- Convenient Test Mode
- 100 hr Lamp Burn-in Timer
- Green LED Indicator

PHYSICAL SPECS

- SIZE: 2.25" H x 1.38" W x 0.82" D (5.715 cm x 3.51 cm x 2.08 cm)
- WEIGHT: 4 oz
- MOUNTING: Snaps into 2 3/16" H x 1 5/16" W x 1" D cavity in fixture
- COLOR: White



JOB NAME:
CAT#:
TYPE:
ORDERING

EXAMPLE: LDA 24 LED 14 DMV WH RF 30 EM OS H4W

LDA		LED		RF		
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. FINISH	7. LENS
LDA	24 24" 48 48" 96 96"	LED	24" Only 14 14 Watts 1860 Lumens 18 18 Watts 2220 Lumens 21 21 Watts 2530 Lumens 48" Only 24 24 Watts 3190 Lumens 28 28 Watts 3720 Lumens 30 30 Watts 3985 Lumens 36 36 Watts 4440 Lumens 40 40 Watts 4820 Lumens 42 42 Watts 5060 Lumens 96" Only 48 48 Watts 6460 Lumens 56 56 Watts 7540 Lumens 60 60 Watts 8080 Lumens 72 72 Watts 9370 Lumens 80 80 Watts 10520 Lumens 84 80 Watts 11050 Lumens	DMV 120-277V Multivolt 0-10V Dimmable SDMV Step dimming 120-277V Multivolt D347V 347VAC 0-10V Dimming D120 Triac Dimming 120VAC D277 Triac Dimming 277VAC	WH White (std) BK Black SL Silver RD Red BN Brushed Nickel	RF Ribbed Frosted

8. COLOR TEMP	9. EMERGENCY(O) ¹	10. SENSOR(O) ¹	11. HANGING KIT(O) ¹	12. PLUG IN OPTIONS(O) ¹
30 3000K 35 3500K 40 4000K 50 5000K	EM Emergency battery pack 10W~1300 Lumens (4ft. 8ft. only)	OS Occupancy Sensor SS Integral On/Off PIR Sensor SSD Integral Dimming PIR Sensor w/ Daylighting SSM Integral Microwave Sensor	H4W HC301 Cable kit with 4' cable & power feed Cable incl. w/ white canopy and cord H4W5 HC301 Cable kit with 4' cable & power feed 0-10V Dimming Cable incl. w/white canopy and cord (5 wire) H12W HC302 Cable kit with 12' cable & power feed Cable incl. w/ white canopy and cord H12W5 HC302 Cable kit with 12' cable & power feed 0-10V Dimming Cable incl. w/white canopy and cord (5 wire)	PI1 3 wire harness, including white, black and green PI2 4 wire harness, including white, black, green and blue for emergency backup PI3D 5 wire harness, including white, black, green, violet and gray

**Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage**	Amps (TL Only)**
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL** - Twist Lock	BK - Black WH - White	(Blank) 120-277V ² 120 - 120V* 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

NOTES:
¹O is optional

²Not available with P or TL

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.





JOB NAME:


CAT#:

TYPE:


DIMENSIONS

LDA24

.575 KNOCKOUT
DISTANCES

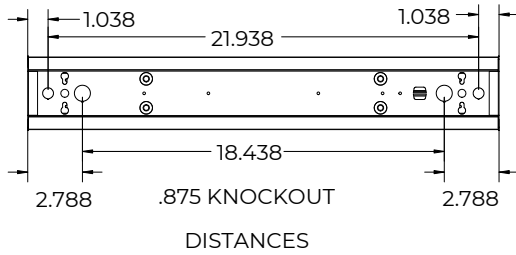


End View

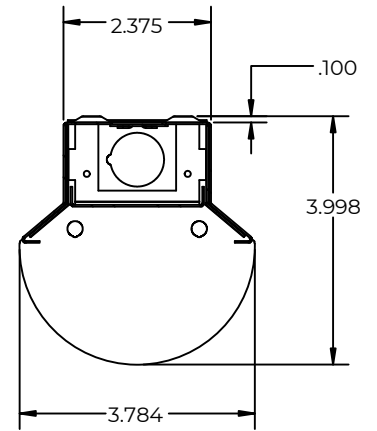

LDA48

.575 KNOCKOUT DISTANCES

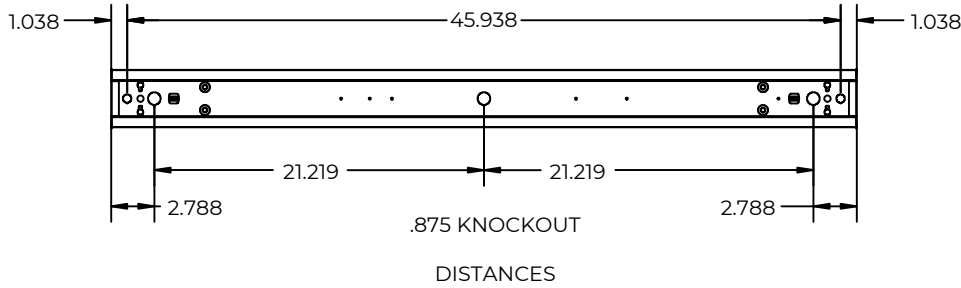

LDA96

.575 KNOCKOUT DISTANCES

