



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

The LHBI LED is a high efficiency I-Beam style high bay fixture engineered for premium performance. A precision-formed silver reflector is designed to achieve maximum light output for ceilings from 15 feet to 40 feet. Based on ceiling height, these fixtures can replace a fluorescent or traditional HID high bay while using up to 50% less energy. Surface or chain mounting systems are available. The fixture is ideally suited for warehouses, manufacturing plants, sports facilities and retail spaces.



Housing is 22 gauge prepainted steel. Air vents surround the drivers in the back of the fixture to maximize LED and driver performance, reliability and life. Highly efficient silver reflectors are computer designed to maximize photometric performance and put the light where you need it. Back access plate allows for fast and hassle-free wiring. Back of fixture is designed with built-in mounting holes for tong hangers, cable kit, or surface mounting (with additional brackets). Chain kit included. 5 year limited system warranty. ETL Listed.





Designed for surface or chain hanging. Mounting holes are provided for simple fast installation. Chain kit included.

FEATURES & BENEFITS

- 22 Gauge White Steel Vented Housing
- Chain kit included
- Environmentally Friendly - Mercury Free
- Rated at 50,000 hrs of L70 Life
- RoHS Compliant
- 5 Year Limited Warranty
- High Power Factor
- ETL Listed

DIMENSIONS

A-LHB1x2WG:

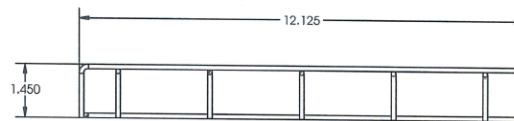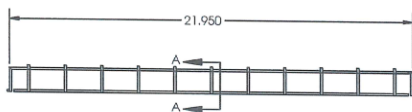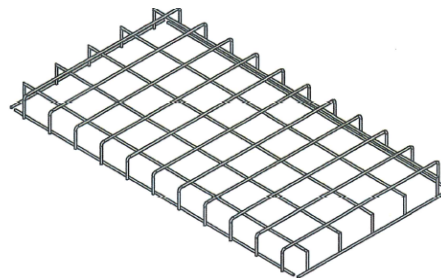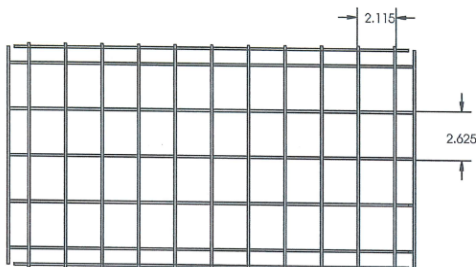

Dimensions and specifications subject to change without notice.








JOB NAME:

CAT#:

TYPE:


DIMENSIONS

A-LHBI2x4WG:

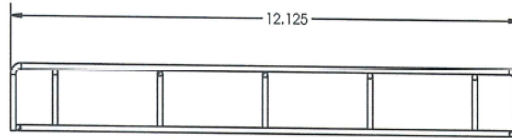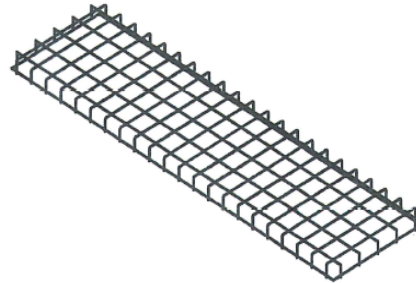


SECTION A-A
SCALE 1 : 2


A-LHBI2x2WG:

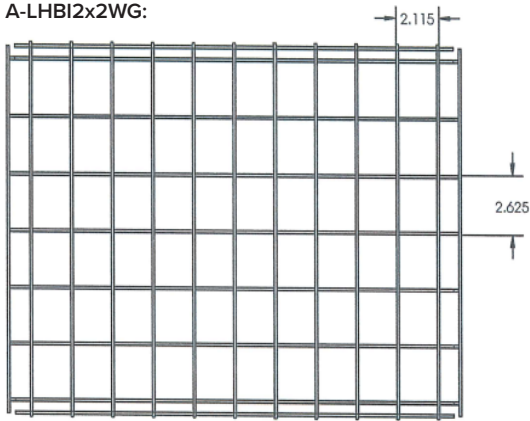


SCALE 1 : 4

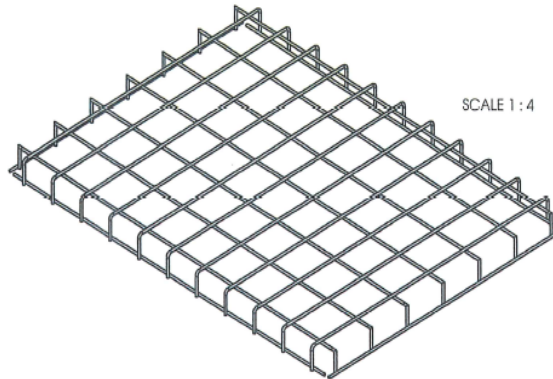

SCALE 1 : 4

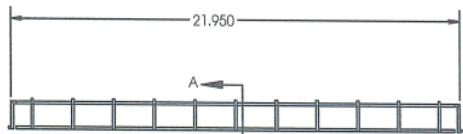

SCALE 1 : 4

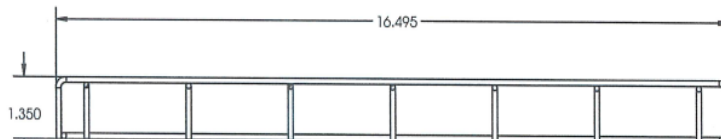

SECTION A-A
SCALE 1 : 2

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: LHBI LED 110 MV 40

LHBI	LED						
1. SERIES	2. GEAR	3. WATTAGE/LUMENS		4. DRIVER		5. COLOR TEMP	
LHBI	LED	110	110 Watts 11,550 Lumens	MV	120-277V	40	4000K
		170	170 Watts 16,800 Lumens			50	5000K
		230	230 Watts 23,1000 Lumens				

**See chart below for whip & cord ordering options

**Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

ACCESSORIES (ORDER SEPARATELY)

- FL-LHBI2x4-MW Door frame and matte white lens
- FL-LHBI2x2-MW Door frame and matte white lens
- FL-LHBI1x2-MW Door frame and matte white lens
- OS Occupancy Sensor
- A-LHBI2x4-WG Wireguard
- A-LHBI1x2-WG Wireguard
- A-LHBI1x2-WG Wireguard

Dimensions and specifications subject to change without notice.

