



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Designed especially for LED, this new LED series provides beautiful glare free lighting from LED arrays. Downlight is shielded with a sleek, rounded frosted ribbed lens. Optional up-light utilizes its own LED array that can be separately switched and is lensed for applications that can be seen from above. Configure for individual lengths in four and eight foot or joined together easily for continuous runs. Pendant mount with adjustable cable kit and available in a variety of off the shelf finishes or custom finishes.



MOUNTING

Standard 4' adjustable power feed & cable (2 for 4' unit or 8' unit, included).

CONSTRUCTION

Rugged steel housing with anti-rust protection powder coated white. Custom paint finishes available.

TYPICAL OPTIONS AND ACCESSORIES

Emergency driver, occupancy sensors, hanging kits, factory installed dimming, standard and custom colors. Contact factory for additional options.

LISTING

Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing.




cETL_{us} listed for damp locations.

DIMENSIONS

W x L x H in inches (mm)

4ft. - 10.8"W x 47"L x 3.94"H

8ft. - 10.8"W x 94"L x 3.94"H

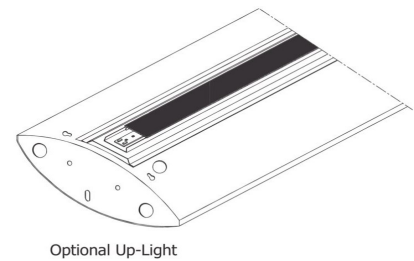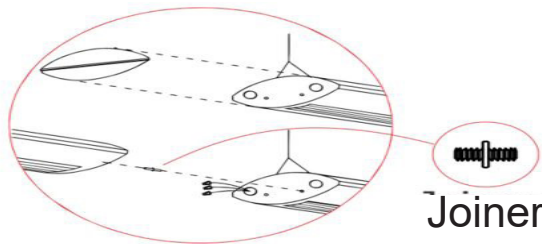

JOB NAME:
CAT#:
TYPE:
ORDERING

EXAMPLE: LPLIA 48 LED 24 DMV WH MW 30 EM PI1 H4W

LPLIA		LED									
1. SERIES	2. SIZE	3. GEAR	4. UPLIGHT/DOWNLIGHT		5. WATTAGE/LUMENS		6. DRIVER		7. LENS		
LPLIA LED Wide Area Direct/ Indirect	48 4' nominal	LED	Blank	Down-light only	4 ft. Up or Down Only		DMV	120-277V Multivolt 0-10V Dimmable	Blank	Frosted Lens Down no upright lens	
	96 8' nominal		U ¹	Up-light only (Not DLC Listed)	24	24 Watts 3025 Lumens					24
			1U2D ¹	33% Up 66% Down	35	35 Watts 4505 Lumens	48	48 Watts 5925 Lumens			
					60	60 Watts 6900 Lumens	60	60 Watts 6900 Lumens			
					4 ft. Uplight & Downlight						
					36	36 Watts 1595L Up 3190L Down	48	48 Watts 2155L Up 4310L Down			
					48	48 Watts 2155L Up 4310L Down	60	60 Watts 2630L Up 5260L Down			
					60	60 Watts 2630L Up 5260L Down	90	90 Watts 3600L Up 7200L Down			
					90	90 Watts 3600L Up 7200L Down	8 ft. Up or Down Only				
					48	48 Watts 5925 Lumens	70	70 Watts 9010 Lumens			
					70	70 Watts 9010 Lumens	96	96 Watts 11850 Lumens			
					96	96 Watts 11850 Lumens	120	120 Watts 13800 Lumens			
					120	120 Watts 13800 Lumens	8 ft. Uplight & Downlight				
					70	70 Watts 3190L Up 6380L Down	70	70 Watts 3190L Up 6380L Down			
					96	96 Watts 4310L Up 8620L Down	96	96 Watts 4310L Up 8620L Down			
					120	120 Watts 5260L Up 10520L Down	120	120 Watts 5260L Up 10520L Down			
					180	180 Watts 7210L Up 14420L Down	180	180 Watts 7210L Up 14420L Down			

8. HOUSING COLOR		9. COLOR TEMP		10. EMERGENCY ^(O) ³		11. PLUG IN OPTIONS ^(O) ³		12. HANGING KIT ^(O) ³		13. CONFIGURATION	
WH	White (std.)	30	3000K	EM	10W, ~1300 lumen battery backup	PI1	3 wire harness, including white, black, and green	H4W	4 Ft. cable kit w/ 3 wire white cord & cable	Blank	Individual
SL	Metallic Silver	35	3500K	EM7	7W, ~900 lumen battery backup	PI2	4 wire harness, in- cluding white black, green, and blue for emergency battery backup	H4W5	4 Ft. cable kit w/ 5 wire white cord & cable	-B	Beginner Run
RD	Red	40	4000K	EM5	5W, ~600 lumen battery backup	PI3D	5 wire harness, including white, black, green, violet, and gray	H12W	12 Ft. cable kit w/ 3 wire white cord & cable	-E	Ender Run
IN	Iron	50	5000K					H12W5	12 Ft. cable kit w/ 5 wire white cord & cable	-J	Joiner
BK	Black										

NOTES:
¹Consult for Uplight Options

²Consult for Triac and Step Dimming

³O is optional

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

