



**JOB NAME:**

**CAT#:**

**TYPE:**

## APPLICATIONS

This kit is designed to convert most recessed fluorescent 1x4, 2x2 and 2x4 troffers and parabolics to long-life and efficient LED technology. These kits provide everything required to enhance the performance and energy savings of your recessed fixture while minimizing labor, clean up and expense. Kits include high-reflectance reflector with driver, LED boards and tek screws for easy assembly. Kits install with simple hand tools in minutes.

The RKT-LED retrofit kits mount easily, requiring only simple hand tools. The process includes removal of the existing ballast cover(s) and removal of the existing socket brackets and ballast. The driver is attached to the backside of the reflector.



## FEATURES & BENEFITS

- Constant Current LED Driver
- Input Voltage: 120-277V AC
- Input Frequency: 50/60Hz
- Reflectors are precision formed and high performance
- <sub>c</sub>ETL<sub>US</sub> recognized as retrofit
- DLC listed in certain models





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: RKT 14 LED 35 DMV 30 SS

RKT		LED								
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		7. COLOR TEMP		7. SENSOR (O)¹	
RKT Retrofit Kit	<b>14</b>	1X4 Troffer Parabolic	<b>LED</b>	<b>Standard 1X4</b>		<b>DMV</b>	120-277V Multivolt 0-10V Dimmable	<b>30</b>	3000K	<b>SS</b> Integrated Sensor
	<b>22</b>	2X2 Troffer Parabolic		<b>28</b>	28 Watt 3500 Lumens			<b>35</b>	3500K	
				<b>35</b>	35 Watt 4300 Lumens			<b>40</b>	4000K	
		<b>24</b>	2X4 Troffer Parabolic		<b>40</b>	40 Watt 4900 Lumens	<b>SDMV</b>	Step dimming multivolt	<b>50</b>	5000K
					<b>48</b>	48 Watt 5800 Lumens	<b>D347</b>	347VAC 0-10 Dimming		
					<b>57</b>	57 Watt 6600 Lumens	<b>D120</b>	Triac Dimming 120VAC		
					<b>Standard 2X2</b>		<b>D277</b>	Triac Dimming 277VAC		
					<b>15</b>	15 Watt 1500 Lumens				
					<b>20</b>	20 Watt 2040 Lumens				
					<b>25</b>	25 Watt 2550 Lumens				
					<b>33</b>	33 Watt 3370 Lumens				
					<b>Standard 2X4</b>					
					<b>20</b>	20 Watt 2040 Lumens				
					<b>25</b>	25 Watt 2550 Lumens				
					<b>30</b>	30 Watt 3060 Lumens				
				<b>35</b>	35 Watt 3570 Lumens					
				<b>40</b>	40 Watt 4080 Lumens					
				<b>45</b>	45 Watt 4590 Lumens					
				<b>54</b>	54 Watt 5500 Lumens					

\*Consult for other wattages

**Notes:**

¹(O) is optional

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.







JOB NAME:

CAT#:



TYPE:

**DIMENSIONS**



**RKT14**

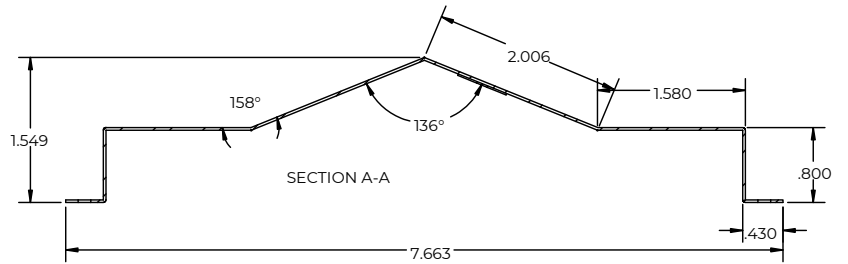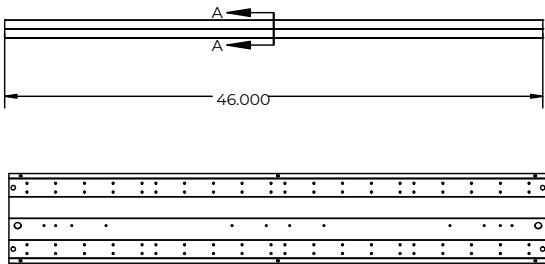

**RKT22**

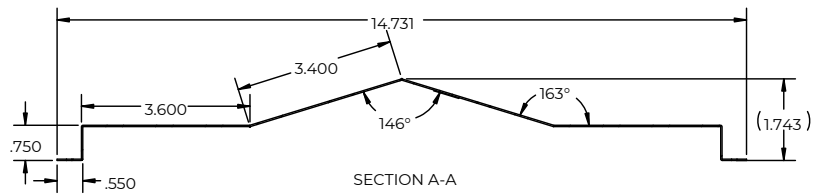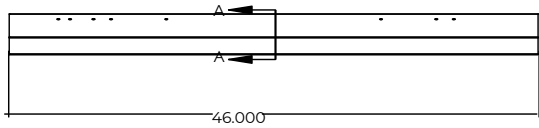

**RKT24**

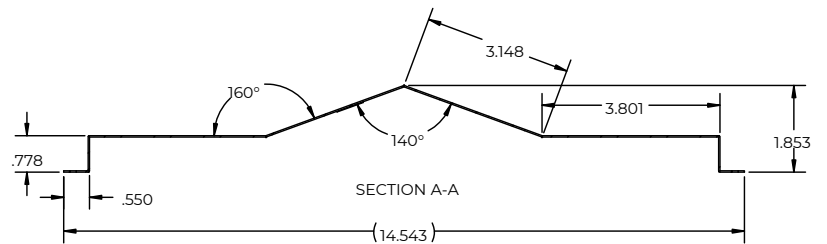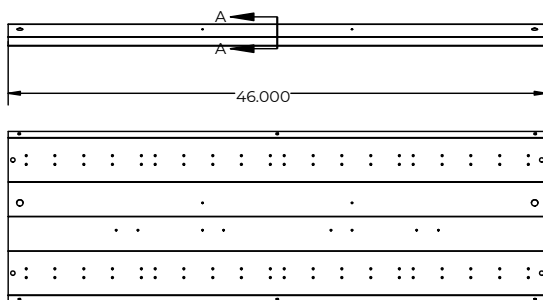

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

