



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

This LED Indirect linear luminaire is available in 4' and 8' lengths. Low profile 2.1" height and 7.9" wide features a choice of die-cast end caps (bull-nose standard).




The die-formed steel housing is available with solid or perforated bottom, with riveted, heavy duty, die-cast aluminum mounting plates. The end caps are die-cast aluminum and are factory installed. Housing and end caps are standard with our exclusive finish featuring an ultra durable white powder top coat. Custom finishes available.

Individual luminaires come with 2 "bull-nose" end caps factory installed and function as a stand alone luminaire. Luminaires can also be combined in long runs joining together starters, runners and ends. Starters and ends have a single "bull-nose" end cap factory installed. Standard feed points are located at the starter. Feed points can be placed at any of the runners to suit building layout or if required to meet electrical loads on longer runs.


FEATURES & BENEFITS

- 4 ft. - 7" x 48" x 2.0"
- 8 ft. - 7" x 96" x 2.0"
- Die-cast aluminum ends - factory installed, spade style with wing design available
- Mount with 4' adjustable cable (2 for 4' unit or 8' unit, included) Consult factory for longer cables.
- Highest quality long life LED
- Double the life expectancy of fluorescent technology
- _cETL_{US} Listed
- 5 year warranty

DIMENSIONS

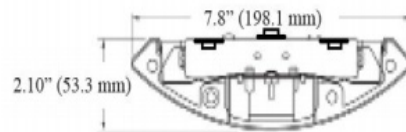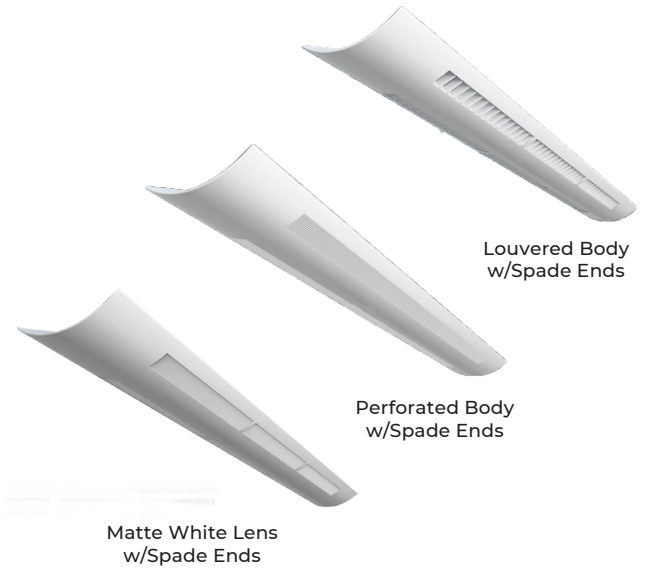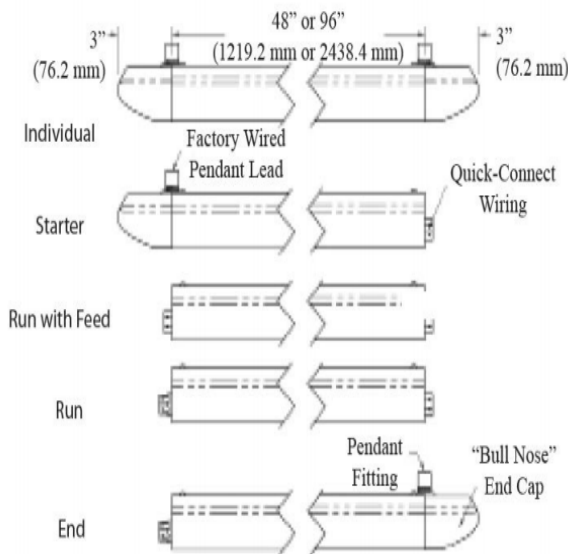

Uplight and Downlight LED module distribution

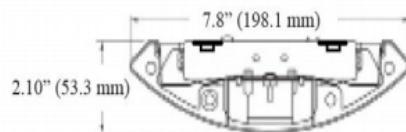

Downlight LED module distribution

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: LI B 48 LED 57 DMV SL 30 BN

LI		LED							
1. SERIES	2. BODY STYLE	3. LENGTH	4. GEAR	5. DISTRIBUTION	6. WATTAGE/LUMENS	7. DRIVER	8. FINISH		
LI LED Linear Indirect	Blank Perforated	48 48"	LED	Blank Uplight only	4 ft.		DMV 120-277V Multivolt 0-10V Dimmable	WH White (std.)	
	B Louver	96 96"			48 48W 4000 Lumens	SDMV Step Dimming 120-277VAC 100%-40%			SL Metallic Silver
	S Matte White Lens				57 57W 4500 Lumens				
	SD Solid				H72 72W 5700 Lumens	IN Iron			
					8 ft.		BK Black		
					97 97W 7900 Lumens		BZ Bronze		
					114 114W 8950 Lumens				
					H114 144W 11500 Lumens				
					4 ft. Up and Downlight				
					36 36W 2500U-720D				
					54 54W 3800U-1000D				
					72 72W 5100U-1400D				
					8 ft. Up and Downlight				
					72 72W 5100U-1400D				
					108 108W 7700U-2100D				

Lumen outputs are approximate and vary by body style.

9. COLOR TEMP	10. NOSE(O) ¹	11. HANGING KIT(O) ¹	12. PLUG IN OPTIONS(O) ¹	13. CONFIGURATION
30 3000K	Blank Bull-nose	H4W Cable kit with 4' cable & power feed. Cable incl.w/white canopy (3 wire) ² non-dimming	PI1 3 wire harness, including white, black and green	Blank Individual
35 3500K	SP Spade-nose	H12W Cable kit with 12' cable & power feed. Cable incl. w/white canopy (3 wire) ² non-dimming	PI2 4 wire harness, including white, black, green and blue for emergency battery backup	-B Beginner Run
40 4000K		H4W5 Cable kit with 4' cable & power feed 0-10V. Dimming. Cable incl. w/white canopy (5 wire)	PI3D 5 wire harness, including white, black, green, violet and gray	-E Ender Run
50 5000K		H12W5 Cable kit with 12' cable & power feed 0-10V Dimming. Cable incl. w/white canopy (5 wire)		-J Joiner

NOTE:
¹O is Optional
²Consult factory for options
 4ft cable & 4 ft power feed cable included
 Bull nose ends are standard. Add SP for spade ends to end of part number

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

