



JOB NAME: CAT#: TYPE:


APPLICATIONS


Typical applications for this series include open office cubicles, offices, conference rooms, restrooms, stairwells, and hallways. The housing is post powder paintes, die-formed, 20 gauge steel with aluminum end caps. The optional Smart Sense technology provides superior detection in hard surfaced areas, such as stairwells and hallways and features Bi-level lighting control. Smart Sense technology can yield energy savings upwards of 50% for fixtures that are normally on 24/7 all year long, while providing adequate illumination for safety and egress.

FEATURES & BENEFITS

- · Optional Ultrasonic Smart Sensor
- Continuous row mounting
- · Post painted powder coat finish
- · White standard, custom colors available
- L70 > 60000 hrs
- Min 80 CRI
- 5 year warranty
- ETL_{us} listed

DIMENSIONS





FS-505 Mounted in Stairwell



Ultrasonic technology for open area detection and line-o-sight obstructions.









SNS200

Occupancy Sensor w/ Daylight Harvesting







JOB NAME: CAT#: TYPE:


DIMENSIONS

2 ft Dimensions

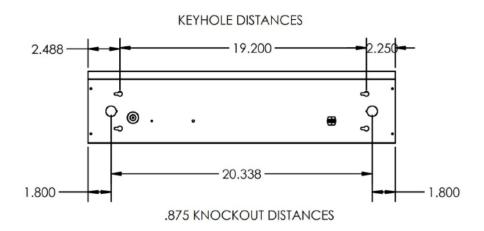



4 ft Dimensions

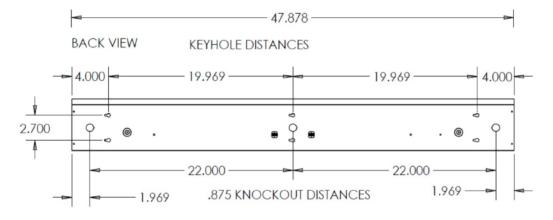









JOB NAME: CAT#: TYPE:

ORDERING

EXAMPLE: STW R 24 LED 15 DMV 30 EM

STW	LED													
1. SERIES	2. LENS		3. SIZE		4. GEAR	5. WATTAGE/LUMENS		6. DRIVER*		7. FINISH		8. COLOR TEMP		
STW	R	Round	24	24"	LED			<u>2 ft.</u> DMV	DMV	DMV Dimming multivolt	Blank	White	30	3000K
			48	48"		15	15W	2050Lumens		120-277V 0-10V	вк	Black	35	3500K
						24	24W	3000 Lumens	*Consult for Triac dimming		SL	Silver	40	4000K
								4 ft.			IN	Iron	50	5000K
						48	48W	6000 Lumens			BZ	Bronze		
						57	57W	6900 Lumens						

9. EM

EM

10 Watts, 1600 Lumens Battery Backup 10. OPTIONAL SMART SENSE

SS-10 10% SS-20 20% SS-30 30% SS-40 40% SS-50 50% SS-60 60% SS-70 70% SS-80 80% SS-90 90%



