


APPLICATIONS

Introducing a new eye catching high efficiency LED light fixture with a narrow acoustic baffle made of sound absorbing material. Class A fire rating option available. It integrates lighting and an acoustic solution into one customizable product. The acoustic material helps create a beautiful and highly functional acoustic baffled ceiling installation. It can be combined with unlit baffles or it can be used as a stand-alone acoustic fixture. Offering multiple colors for different applications or mixing colors to create a dynamic look. Pair LED light fixture with acoustic baffles in the same or complimentary colors. Available in Ift increments up to 8ft in length and various heights from 12" to 24". The LED light fixture slightly regressed into the acoustic housing for great lighting effect. Consult for noise reduction coefficient (NRC). For more lighting information please see the L23 series.

FEATURES & BENEFITS

- · 30+ acoustic material colors available
- Pendant mount accommodates most ceiling types
- · CRI >80 (90 CRI available)
- >50,000 hrs of L₇₀ LED life
- 0-10 Volt dimmable 120-277V
- · Power factor >0.90
- 5 year warranty





 $\label{lem:decomposition} \mbox{Dimensions and specifications subject to change without notice.}$



ORDERING

EXAMPLE: ABL3 24 16 LED U 23 DMV A52 W 30 EM

LED

ADL													
1. SERIES ABL3	2. LENGTH		3. HEIGHT		4. GEAR	5. DISTRIBUTION		6.	6. WATTAGE/LUMENS		ER .	8. FLAIR A ²	
	24 48	25.20" 47.28"		LED	Blank	Downlight (std.)		Downlight or Uplight Only 24 in.	DMV	120-277V Multivolt	44 19 11	lvory Denim Steel	
	72 96		24	24"		IUID	Uplight and Downlight	12 24	12 Watts 1320 Lumens 24 Watts 2640 Lumens		0-10V Dimmable	"	Steel
	90	91.95				1U2D	Uplight and Downlight	24	48 in. 24 Watts 2640 Lumens	D120	Triac Dimming 120VAC		
						U	Uplight	48	48 Watts 5290 Lumens <u>72 in.</u>				
								36 72	36 Watts 3960 Lumens 72 Watts 7920 Lumens				
									<u>96 in.</u>				
								52 96	52 Watts 5720 Lumens 96 Watts 10560 Lumens				
									1 Up and 1 Down Only 48 in.				
								10	10 Watts 500U-500D 1 Up and 2 Down Only				
								18	24 in. 18 Watts 660U-1320D				
								27	27 Watts 990U-1980D				
								36	48 in. 36 Watts 1320U-2640D				
								54	54 Watts 1980U-3960D 72 in.				
								54 81	54 Watts 1980U-3960D 81 Watts 2970U-5940D				
									<u>96 in.</u>				
								72 108	72 Watts 2640U-5280D 108 Watts 3960U-7920D				
								108	100 Walls 33000-7320D				

9. MAT	ERIAL CLASS	10. CRI		11. CO	LOR TEMP	12. HANGING KIT	(O) ⁵
Blank A	Class B	Blank 9	80 90	30 35	3000K 3500K	HC605WH	Cable kit with 6' cable & 5 wires power feed/cable incl., clear cord
^	Cluss A	•	30	40	4000K		and white canopy
				50	5000K	HC605WHNPF	Cable kit with 6' cable & white canopy, non power feed
						HC612WH	Cable kit with 12' cable & 5 wires power feed/cable incl., clear cord and white canopy
						HC612WHNPF	Cable kit with 12' cable & white
are typical	or recorded un	der stai	ndardize	d cond	litions at 25°C	Actual	canopy, non power feed

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.




ACOUSTIC MATERIAL COLOR OPTIONS



Dimensions and specifications subject to change without notice.



DRAWINGS & IMAGES - Direct and Indirect

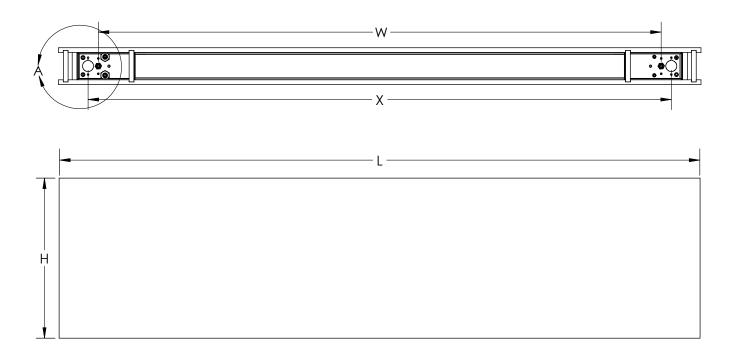


Sample Part Number	L	W	Н	X
ABL324	25.20"	19.32"	12",16",24"	20.82"
ABL348	47.28"	41.42"	12",16",24"	42.92"
ABL372	79.41"	63.55"	12",16",24"	65.05"
ABL396	91.93"	86.05"	12",16",24"	87.55"

L-Length H-Height

W-Hanging Kit Dimensions

X-Power Knockouts



Dimensions and specifications subject to change without notice.