



JOB NAME:

CAT#:


TYPE:

### APPLICATIONS

Premium quality low profile troffer with an almost limitless range of applications. Ideal for all commercial and industrial buildings requiring general illumination with recessed configurations.

### FEATURES & BENEFITS


- Min 80 CRI
- L70 life >60,000
- Corrosion and scratch resistant
- Smooth edges for easy handling
- Ends are secured by snap-in interlocking system
- .100 acrylic prismatic lens is standard
- Exclusive "Light Lock" frame reduces light leaks
- Flush steel door with rotary action cam latches and hinges from either side
- Easy access plate for quick wiring
- Equipped with Integral Earthquake Clips
- ETL listed for damp location

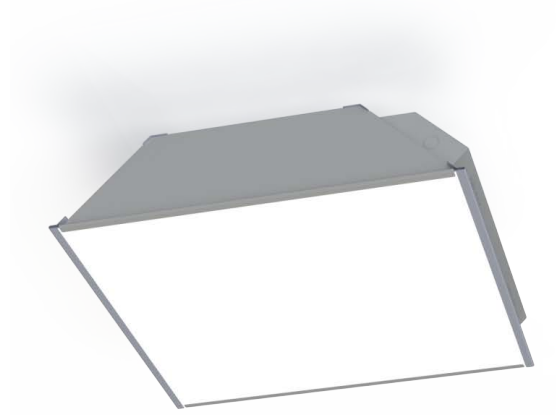

### SPECIFICATIONS

Housing is die-formed and embossed from 18 gauge high grade aluminum. A vented driver cover box on the back side of the fixture allows easy access to wiring and electronics.

### DIMENSIONS

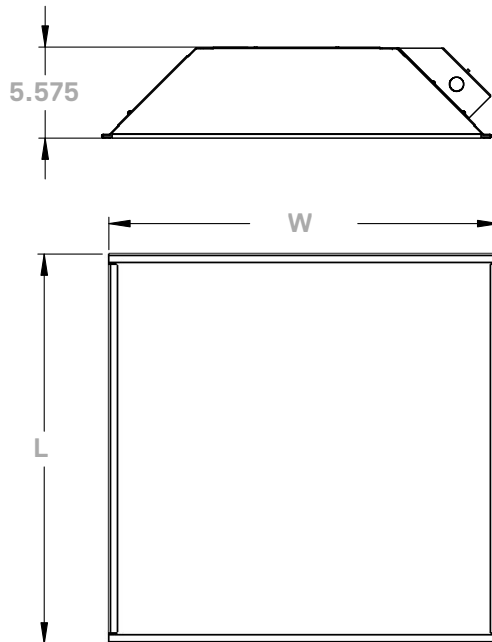

SIZE	W	L
22 (24 X 24)	23.875 in.	23.875 in.
24 (24 X 48)	23.875 in.	47.875 in.

Dimensions and specifications subject to change without notice.





**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: FHBG 22 LED 80 DMV FR 40K EM14

FHBG		LED				
1. SERIES	2. LENGTH	3. GEAR	4. WATTAGE/LUMENS	5. DRIVER	6. LENS	
FHBG	22 2x2	LED	<b>Standard 2x2</b>		DMV 120-277V Multivolt 0-10V Dimmable	FR High Optic Frosted
	24 2x4		80 80 Watts 11400 Lumens	100 100 Watts 14250 Lumens		
			142 142 Watts 20200 Lumens	SDMV Step Dimming Multivolt		
			168 168 Watts 26000 Lumens			
			<b>Standard 2x4</b>			
			168 168 Watts 25000 Lumens			
			190 190 Watts 29000 Lumens			
			238 238 Watts 36000 Lumens			
			300 300 Watts 42750 Lumens			

7. COLOR TEMP	8. EM (O) <sup>1</sup>	9. WIREGUARD (O) <sup>1</sup>
30 3000K	EM14 12W Battery Backup	WG Wraparound Wireguard
35 3500K		
40 4000K	EM20 20W Battery Backup	
50 5000K		

**NOTES:**

<sup>1</sup> O is optional

Dimensions and specifications subject to change without notice.