



Texas Fluorescents  
Reinvented

CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

# Series PRO

## Shaped for Unique Lighting Applications

The Profile Series is extremely rugged, resistant to heavy impacts, dust proof, water proof and vandal resistant making them ideal for environments such as factories, warehouses, parking garages and car washes yet stylish enough for commercial and residential applications like stairwells, hallways, schools, supermarkets, apartment and condo complexes. Profile Series is an attractive and durable lighting solution that can replace traditional linear fluorescent luminaires. Specifically built to withstand conditions susceptible to water, dust and corrosion.

### CONSTRUCTION

Co-Extruded housing, integrated frosted lens, encapsulated electrical enclosure, 316 aluminum hanging clips, IP66 rated.

### MOUNTING

Multiple mounting options with surface and suspended mounting kits

### TYPICAL OPTIONS & ACCESSORIES

Rubber plug knockouts, Emergency Battery back-up-90 minute. Contact factory for more details.



### DIMENSIONS

2ft and 4ft lengths

### FEATURES & BENEFITS

- Designed for LEDs
- Familiar Economical Mounting Options
- (f1) Rated Material Co-extruded Housing and Lens
- The encapsulated electrical closure is where all higher voltages are to be located
- All components compiling the encapsulated electrical enclosure are constructed of no less than 5VA approved materials
- 0-10V Dimming, 120-277VAC (ELV/TRIAC Dimming at 120V only)
- UL Wet Location
- Max ambient temp w/battery backup: 35°C
- Max ambient temp w/out battery backup: 40°C
- IP66 (Vent required)




CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

Series PRO  
Shaped for Unique Lighting  
Applications

**DRAWINGS & IMAGES**



**END VIEW**

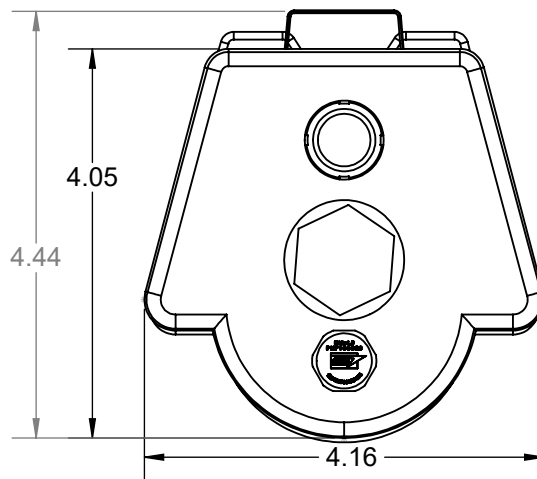

Available in 2 and 4 Ft sizes - Consult for other Options



Texas Fluorescents  
Reinvented

CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

# Series PRO

Shaped for Unique Lighting  
Applications

## ORDER INFORMATION

SERIES	LENGTH		WATTAGE & LUMENS*		DRIVER		COLOR		FINISH <sup>2</sup>		FLAIR <sup>2</sup>	
PRO	24L	24"	Z16W1700L	16 Watts, 1700 Lumens	DMV	0-10V Dimming	30K	3000K	BK	Black	BK	Black
			Z24W2500L	24 Watts, 2500 Lumens			35K	3500K				
PRO	48L	48"	Z32W3300L	32 Watts, 3300 Lumens	G120	ELV/TRIAC dimming at 120V only	40K	4000K	GR	Gray	GR	Gray
			Z48W5000L	48 Watts, 5000 Lumens			50K	5000K				

### OPTIONS

<b>CS</b>	Cordset 6' 3 Wire
<b>CS12</b>	Cordset 12' 3 Wire
<b>EM</b>	10 Watt Emergency Back-up ~1200 Lumens ~90 minute emergency
<b>MDT4</b>	Occupancy Sensor
<b>MDT4W</b>	Wet Location Occupancy Sensor

Consult factory for more hanging options

1. Consult factory for availability.
2. Finish refers to the color of the fixture body, flair refers to the color of the endcaps.

**NOTE:** : Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.