



JOB NAME:

CAT#:


TYPE:

### APPLICATIONS


This full body micro silhouette makes a bold statement with a minimal design in your choice of finish. Scaled to the LED the matte white diffuser surrounds the diodes for soft lighting. This fixture can be surface mounted on wall or ceiling or pendant mounted with a specially engineered cable mounting kit.

### FEATURES & BENEFITS

- Fully assembled housing is formed and welded, 22 gauge steel, chemically treated to resist corrosion and enhance paint adhesion
- Clean body - No knock-outs on sides or ends.
- Knockouts on back accept standard electrical fittings (by others). Consult factory for other locations.
- Surface mount or pendant mount; horizontal or vertical
- $L_{70} \geq 60,000$ hrs
- Min CRI 80
- cETL<sub>US</sub> Listed

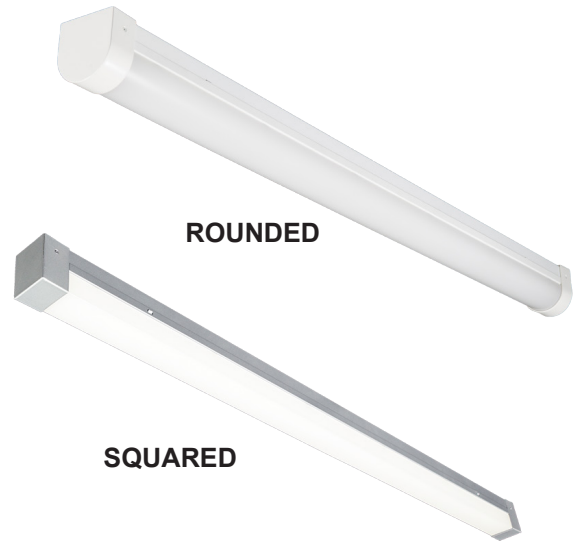

### DIMENSIONS

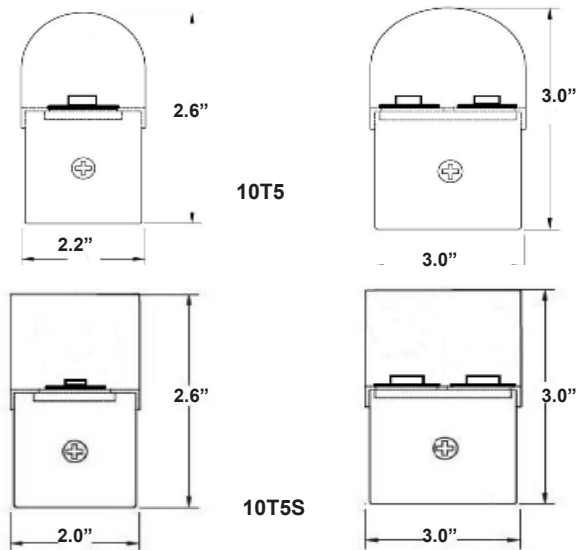



JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: 10T5 24 LED 12 DMV WH SW 40

**LED**

1. SERIES	2. WIDTH	3. LENGTH	4. GEAR	5. WATTAGE/LUMENS	6. DRIVER	7. FINISH
<b>10T5</b> Rounded LED Surface Mount	(Blank) 2" W 3"	24 22.5" 36 34.5" 48 46.25" 96 92"	LED	<b>24 (2" Wide)</b> 12 12 Watts 1050 Lumens 18 18 Watts 1700 Lumens <b>24 (3" Wide)</b> 24 24 Watts 2160 Lumens 28 28 Watts 2700 Lumens 35 35 Watts 3400 Lumens <b>36 (2" Wide)</b> 22 22 Watts 1600 Lumens 29 29 Watts 2755 Lumens 36 36 Watts 3240 Lumens <b>36 (3" Wide)</b> 44 44 Watts 4180 Lumens 58 58 Watts 5510 Lumens <b>48 (2" Wide)</b> 24 24 Watts 2160 Lumens 28 28 Watts 2520 Lumens 36 35 Watts 3240 Lumens <b>48 (3" Wide)</b> 32 32 Watts 2880 Lumens 40 40 Watts 4000 Lumens 48 48 Watts 4320 Lumens 57 57 Watts 5400 Lumens 72 72 Watts 7000 Lumens <b>96 (2" Wide)</b> 32 32 Watts 3200 Lumens 48 48 Watts 4320 Lumens 57 57 Watts 5400 Lumens 72 72 Watts 6480 Lumens <b>96 (3" Wide)</b> 80 80 Watts 8000 Lumens 114 114 Watts 10250 Lumens 144 144 Watts 12960 Lumens	<b>DMV</b> 120-277V Multivolt 0-10V Dimmable <b>SDMV</b> Step dimming Multivolt <b>D120</b> Triac Dimming 120VAC <b>D277</b> Triac Dimming 277VAC <b>D1MV</b> 120-277VAC 0-10V Dimming (dim to 1%)	<b>WH</b> White <b>BK</b> Black <b>BN</b> Brushed Nickel <b>BZ</b> Bronze <b>SI</b> Silver

<b>8. LENS</b> SW Smooth White	<b>9. COLOR TEMP</b> 30 3000K 35 3500K 40 4000K 50 5000K	<b>10. SENSOR (O)<sup>1</sup></b> SS Integrated Sensor* *Only available in 3" width	<b>11. CORD (O)<sup>1</sup></b> CS 6' cord	<b>12. OPTIONS (O)<sup>1</sup></b> EM Emergency
-----------------------------------	--	--	---	--

**Notes:**  
<sup>1</sup>(O) is optional

**ACCESSORIES**

- A-HC501WH5W** Cable Kit w/ 4ft cord & power feed cable 0-10V dimmable. Cable included w/ white canopy
- A-HC501BN5W** Cable Kit w/ 4ft cord & power feed cable 0-10V dimmable. Cable included w/ brushed nickel canopy
- WP** 6ft 3 Wire whip
- WPS** 6ft 5 Wire whip

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.