



JOB NAME:

CAT#:

TYPE:

### APPLICATIONS

LED retrofit kit, converts an existing strip to an efficient LED luminaire. Material is die-formed 22 gauge steel, with high reflectance baked white enamel finish


### FEATURES & BENEFITS

- Easy assembly and maintenance
- Available in 24" 48" and 96" (4' & 8' lengths). Consult for 3' and 6'
- MIN CRI 80
- cETL<sub>us</sub> recognized as retrofit
- Estimated L<sub>70</sub> > 60,000hrs at 25°C



### DIMENSIONS

#### RKBC48

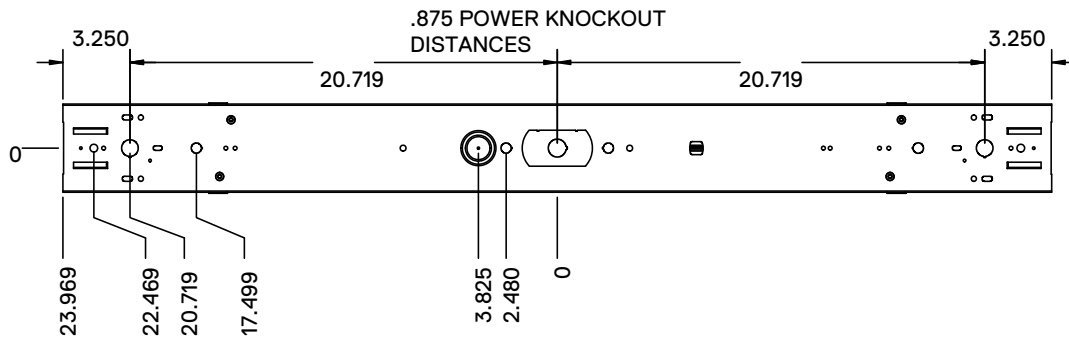

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.






JOB NAME:

CAT#:

TYPE:



**DIMENSIONS**

**RKBC24**

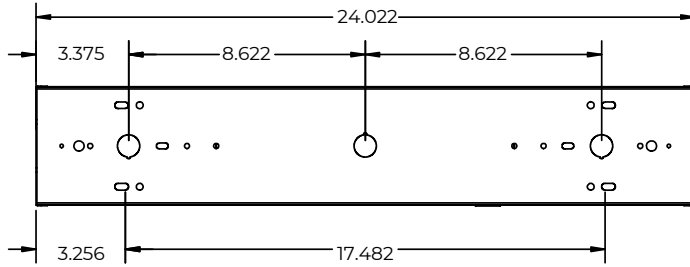


Strip Width

(4.25 or 5.0 in.)

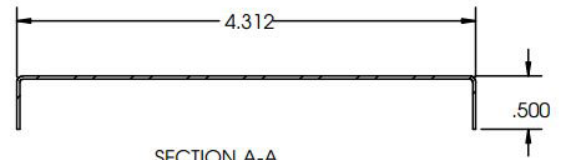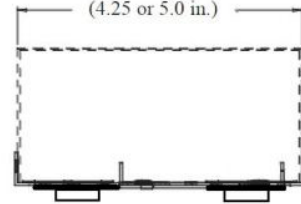


**RKBC48**

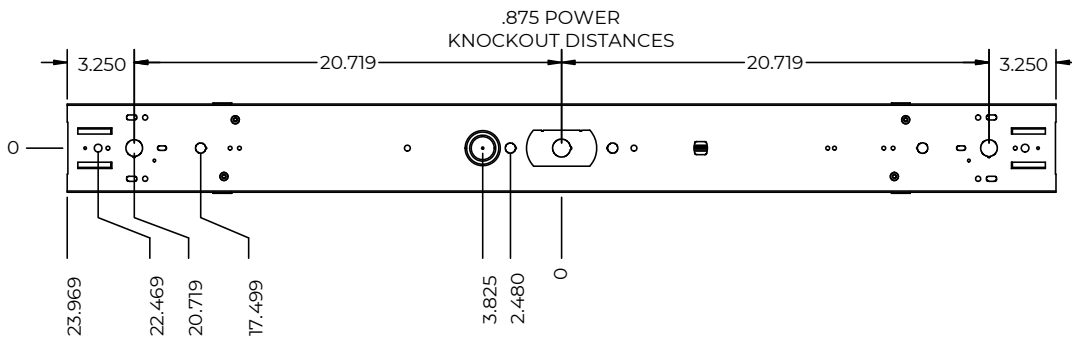

**RKBC96**

SCALE 1:10

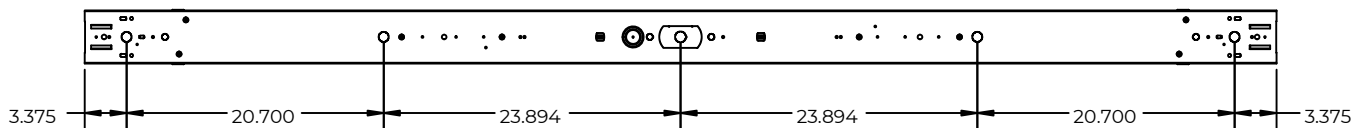

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.





JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: RKBC 48 5 LED 35 DMV 30 EM OS CS WG

RKBC		LED							
1. SERIES	2. LENGTH	3. WIDTH	4. GEAR	5. WATTAGE/LUMENS	5. DRIVER	7. COLOR TEMP			
RKBC	24 24" 48 48" 96 96"	4 4.25" 5 5"	LED						
				<b>2 ft.</b>					
				15 24 Watts 3500 Lumens	DMV 120-277V Multivolt 0-10V Dimmable	30 3000K			
				20 30 Watts 4300 Lumens		35 3500K			
				25 35 Watts 4900 Lumens		40 4000K			
				33 48 Watts 6500 Lumens	SDMV Step Dimming 120-277VAC 100%-40%	50 5000K			
					*Consult for Triac Dimming				
				<b>4 ft.</b>					
				15 15 Watts 2500 Lumens					
				20 20 Watts 3400 Lumens					
				25 25 Watts 4250 Lumens					
				30 30 Watts 5200 Lumens					
				35 35 Watts 5900 Lumens					
				40 40 Watts 6650 Lumens					
				45 45 Watts 7400 Lumens					
				50 50 Watts 8150 Lumens					
				54 54 Watts 8550 Lumens					
				<b>8 ft.</b>					
				30 30 Watts 5000 Lumens					
				40 40 Watts 6800 Lumens					
				50 50 Watts 8450 Lumens					
				60 60 Watts 10350 Lumens					
				70 70 Watts 11700 Lumens					
				80 80 Watts 13300 Lumens					
				90 90 Watts 14800 Lumens					
				100 100 Watts 16300 Lumens					
				108 108 Watts 17100 Lumens					

\*Consult for other wattages

**ACCESSORIES**

- A69 -Wire guard per 4 ft.
- L1085 -4ft. Frosted Lens\*
- L1085-TANDEM -8ft. Seamless Frosted Lens\*



Frosted lens accessory reduces LED glare\*

\*Frosted lens is for 4.25" width only

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

