

Series ECL

Rounded Silhouette LED Surface Mount

The softly rounded Eclipse profile adds a pleasant architectural element to any commercial environment. Featuring a choice of decorative end cap finishes, both luminous and opaque, to coordinate with the most popular interior finishes.

CONSTRUCTION

Low-profile, softly-rounded silhouette fixture for a wide variety of modern interior applications that will "eclipse" the competition.

MOUNTING

Direct wall mount

TYPICAL OPTIONS & ACCESSORIES

Featuring a choice of six decorative end caps – both luminous and opaque – to coordinate with today's most popular interior finishes and countertops. Emergency battery backup option. TRIAC dimmable option available. Contact factory for more details.



DIMENSIONS

224L - 25.75"L x 9.5"W x 4.5"H
248L - 51.25"L x 9.5"W x 4.5"H
424L - 25.75"L x 16.5"W x 4.5"H
448L - 51.25"L x 16.5"W x 4.5"H

FEATURES & BENEFITS

- Four different sizes with option of six end cap styles (see page 2)
- Matte white lens standard, optional prismatic acrylic #12 pattern or MicroProfile lenses
- Nearly 2" shallower than the Puff (Series PUF)
- Multiple color temperatures available for immediate shipping (3000K, 3500K, 4000K, 5000K); consult factory for RGBW option
- Several lumen packages / wattages achievable through use of programmable drivers
- Suitable for dry or damp locations
- CRI >80 standard, 90 optional
- L70: >50,000 Hours
- Dimming: 0-10V 120-277V standard, 120V ELV/TRIAC optional
- Power factor >0.90
- Emergency battery backup option available
- 5 year warranty



ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.


SERIES	LENS MATERIAL		WIDTH		SIZE		WATTAGE * & LUMENS*		DRIVER		CCT/CRI	
ECL LED Surface Rounded Silhouette	A	Prismatic acrylic #12 pattern	2	9.5"	24L	25.75"	Y24W2000L	24 Watts 2000 Lumens	DMV	0-10V Dimming	30K	3000K 80 CRI
	MW	Matte white acrylic					Y36W2900L	36 Watts 2900 Lumens	G120	ELV/TRIAC Dimming at 120V only	35K	3500K 80 CRI
	RE	MicroProfile diffuser			48L	51.25"	Y32W2900L	32 Watts 2900 Lumens	D1MV	0-10V Dimming (dim to 1%)	40K	4000K 80 CRI
							Y48W4000L	48 Watts 4000 Lumens			50K	5000K 80 CRI
							Y57W4500L	57 Watts 4500 Lumens			930K	3000K 90CRI
			4	16.5"	24L	25.75"	Y48W4000L	48 Watts 4000 Lumens			935K	3500K 90CRI
					48L	51.25"	Y96W8000L	96 Watts 8000 Lumens			940K	4000K 90CRI

END CAP FINISH	
WH	White
WM	White marble
IM	Ivory marble
TO	Tortoise
SI	Silver

End Finishes



White



Ivory Marble



Silver



Tortoise



White Marble

Note:

* Programmable LED drivers allow custom configured wattages and corresponding lumens.


** Consult factory for 90 CRI 5000K availability.

Remote EM only. Not available for sensor options.


We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.

DRAWINGS & IMAGES

Back 248L

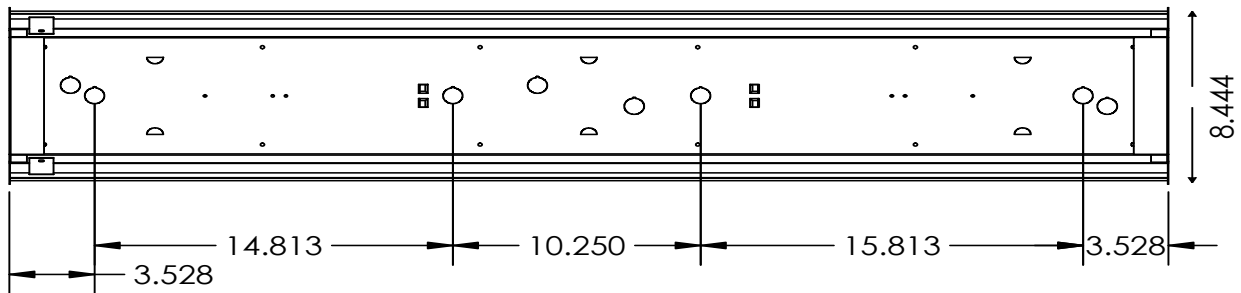

448L

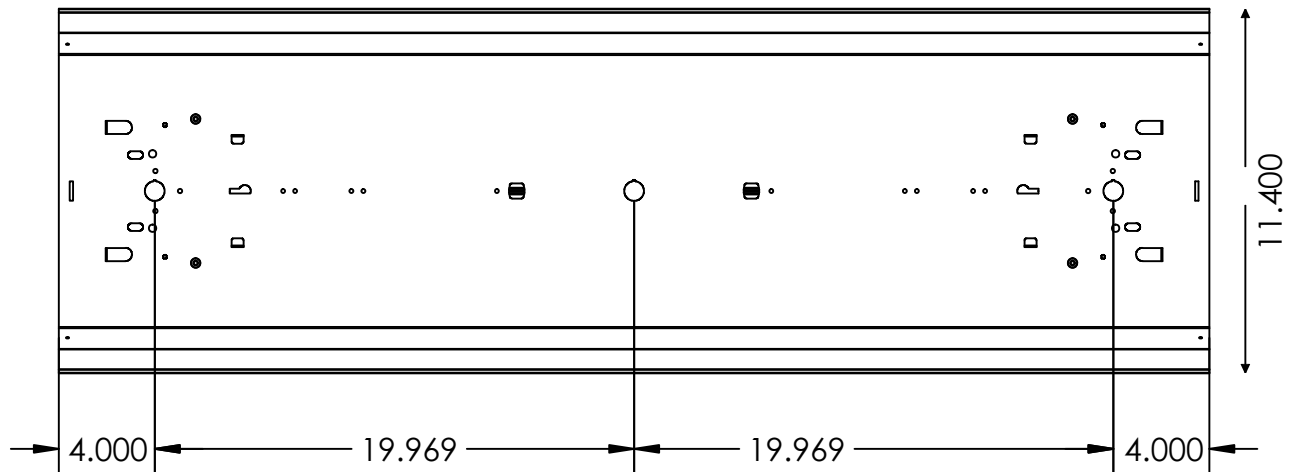

.875 POWER KO DISTANCES