



JOB NAME:

CAT#:


TYPE:

### APPLICATIONS


This full body micro silhouette makes a bold statement with a minimal design in your choice of finish. Scaled to the LED the matte white diffuser surrounds the diodes for soft lighting. This fixture can be surface mounted on wall or ceiling or pendant mounted with a specially engineered cable mounting kit.

### FEATURES & BENEFITS

- Fully assembled housing is formed and welded, 22 gauge steel, chemically treated to resist corrosion and enhance paint adhesion
- Clean body - No knock-outs on sides or ends.
- Knockouts on back accept standard electrical fittings (by others). Consult factory for other locations.
- Surface mount or pendant mount; horizontal or vertical
- $L_{70} \geq 60,000$ hrs
- Min CRI 80
- $cETL_{US}$  Listed

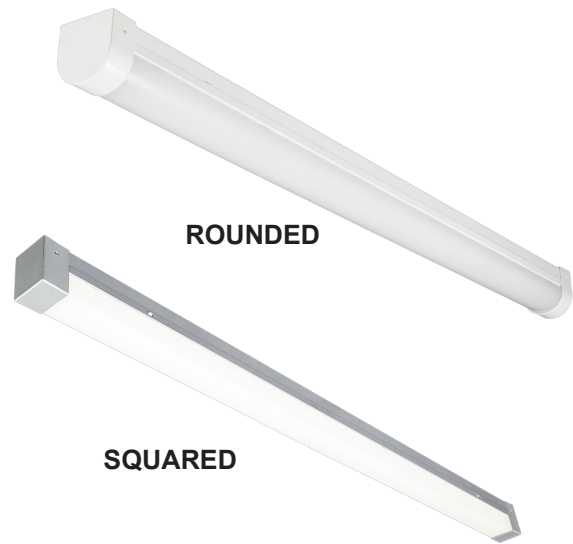

### DIMENSIONS

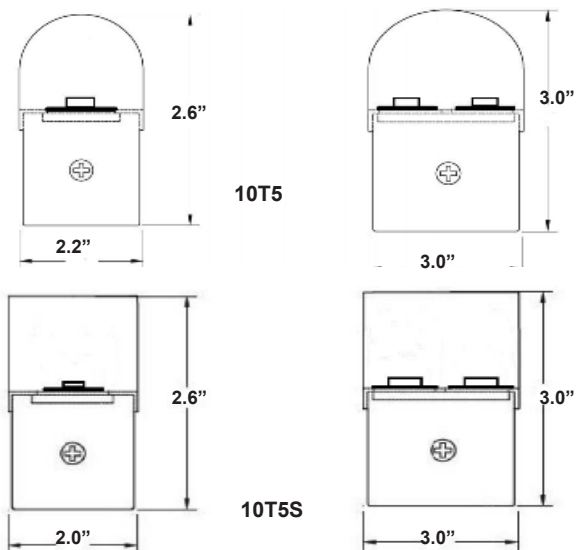



JOB NAME:

CAT#:

TYPE:

**ORDERING**

EXAMPLE: 10T5 24 LED 12 DMV WH SW 40

**LED**

1. SERIES	2. WIDTH	3. LENGTH	4. GEAR	5. WATTAGE/LUMENS	6. DRIVER	7. FINISH
<b>10T5</b> Rounded LED Surface Mount	(Blank) 2" W 3"	<b>24</b> 22.5" <b>36</b> 34.5" <b>48</b> 46.25" <b>96</b> 92"	LED	<b>24 (2" Wide)</b> <b>12</b> 12 Watts 1050 Lumens <b>18</b> 18 Watts 1700 Lumens <b>24 (3" Wide)</b> <b>24</b> 24 Watts 2160 Lumens <b>28</b> 28 Watts 2700 Lumens <b>35</b> 35 Watts 3400 Lumens <b>36 (2" Wide)</b> <b>22</b> 22 Watts 1600 Lumens <b>29</b> 29 Watts 2755 Lumens <b>36</b> 36 Watts 3240 Lumens <b>36 (3" Wide)</b> <b>44</b> 44 Watts 4180 Lumens <b>58</b> 58 Watts 5510 Lumens <b>48 (2" Wide)</b> <b>24</b> 24 Watts 2160 Lumens <b>28</b> 28 Watts 2520 Lumens <b>36</b> 35 Watts 3240 Lumens <b>48 (3" Wide)</b> <b>32</b> 32 Watts 2880 Lumens <b>40</b> 40 Watts 4000 Lumens <b>48</b> 48 Watts 4320 Lumens <b>57</b> 57 Watts 5400 Lumens <b>72</b> 72 Watts 7000 Lumens <b>96 (2" Wide)</b> <b>32</b> 32 Watts 3200 Lumens <b>48</b> 48 Watts 4320 Lumens <b>57</b> 57 Watts 5400 Lumens <b>72</b> 72 Watts 6480 Lumens <b>96 (3" Wide)</b> <b>80</b> 80 Watts 8000 Lumens <b>114</b> 114 Watts 10250 Lumens <b>144</b> 144 Watts 12960 Lumens	<b>DMV</b> 120-277V Multivolt 0-10V Dimmable <b>SDMV</b> Step dimming Multivolt <b>D120</b> Triac Dimming 120VAC <b>D277</b> Triac Dimming 277VAC <b>D1MV</b> 120-277VAC 0-10V Dimming (dim to 1%)	<b>WH</b> White <b>BK</b> Black <b>BN</b> Brushed Nickel <b>BZ</b> Bronze <b>SI</b> Silver

<b>8. LENS</b> SW Smooth White	<b>9. COLOR TEMP</b> <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K	<b>10. SENSOR (O)<sup>1</sup></b> SS Integrated Sensor* *Only available in 3" width	<b>11. CORD (O)<sup>1</sup></b> CS 6' cord	<b>12. OPTIONS (O)<sup>1</sup></b> EM Emergency <sup>2</sup>
-----------------------------------	--	--	---	---

**ACCESSORIES**

<b>A-HC501WH5W</b>	Cable Kit w/ 4ft cord & power feed cable 0-10V dimmable. Cable included w/ white canopy
<b>A-HC501BN5W</b>	Cable Kit w/ 4ft cord & power feed cable 0-10V dimmable. Cable included w/ brushed nickel canopy
<b>WP</b>	6ft 3 Wire whip
<b>WPS</b>	6ft 5 Wire whip

**Notes:**

<sup>1</sup> (O) is optional

<sup>2</sup> Internal EM only available in 3" or wider and 4' or longer fixture.

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.