

Series SBX

LED Recessed Sky Box — Back-Lit Flat Panel w/Innovative Shroud

The Series SBX Back-Lit Flat Panel provides comfortable, abundant lighting from a thin and modern design. Available in 1x4, 2x2 and 2x4 sizes, in multiple color temperatures and with 0 to 10 Volt dimming.

The SBX is designed for T-Bar recessed mounting with driver box on the top side of the panel. The panel can be chain or cable mounted with a high tech look achieved by the thin panel profile and the visible driver box on top. The panel has an unobtrusive white edge.

These panels are an ideal choice for many applications including offices, circulation spaces, and retail spaces, plus residential areas such as remodeled kitchens for a skylight appearance.

CONSTRUCTION

Housing is white aluminum that is sealed and is a Non-IC type fixture. The lens is evenly diffused frosted material. The driver is a Class 2 compliant design, featuring low voltage, limited power with 0-10V dimming as standard. Available in BFP Series.

TYPICAL OPTIONS & ACCESSORIES

Emergency battery backup, whips and frame kits. The Skybox accessory can be customized to any specified color to add visual interest. Universal fitting works with both the SBX or any flat panel.

DIMENSIONS

- 1x4- 11.78”L x 47.50”W x 4.688”H
- 2x2- 23.75”L x 23.75”W x 4.688”H
- 2x4- 23.95”L x 47.688”W x 4.688”H

FEATURES & BENEFITS

- Ultra-thin LED panel light made from high-grade aluminum
- Optional Skybox shroud accessory available in white or specified custom color
- Environmentally-friendly mercury free
- BFP Series available with 4-position switch to select between 3000K, 3500K, 4000K and 5000K
- Emergency battery backup available
- CRI >80
- 0-10 Volt dimmable 120-277V
- High efficacy
- No Ultraviolet (UV) and or Infrared (IR)
- Power factor >0.99
- 5 year warranty



ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	LENGTH	WATTAGE & LUMENS		DRIVER		COLOR		FINISH ¹	
SBX	14L 1x4	<u>2x2 and 1x4 only</u>		DMV	0-10V Dimming	MCT4	Multiple color temperature 3000K,3500K, 4000K, 5000K on a 4-position switch	WH	White
	22L 2x2	40M4400L	Defaulted 40 Watts / 4400 Lumens 20 Watts / 2200 Lumens 30 Watts / 3300 Lumens 40 Watts / 4400 Lumens (default) on a 3-position switch						
	24L 2x4								
			<u>2x4 only</u>						
		50M5500L	Defaulted 50 Watts / 5500 Lumens 30 Watts / 3300 Lumens 40 Watts / 4400 Lumens 50 Watts / 5500 Lumens (default) on a 3-position switch						

OPTIONS

EM	10W 90 mins emergency battery backup
EM7	7W 90 mins emergency battery backup
EM12	12W 90 mins emergency battery backup
EM20	20W 90 mins emergency battery backup

SKYBOX ONLY¹

SERIES	LENGTH
SBX14	1x4 - 12"L x 47.65"W x 3.68"H
SBX22	2x2 - 23.95"L x 23.95"W x 3.68"H
SBX24	2x4 - 23.95"L x 47.86"W x 3.68"H



DLC LISTED ITEMS

ITEM NUMBERS

BFP14L40M4400LDMVMCT4
BFP22L40M4400LDMVMCT4
BFP24L50M5500LDMVMCT4

¹Consult factory for custom finish options.

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

CATALOG# : _____

PROJECT : _____


TYPE : _____

Series SBX


LED Recessed Sky Box—Back-Lit
Flat Panel w/Innovative Shroud

DRAWINGS & IMAGES



1x4

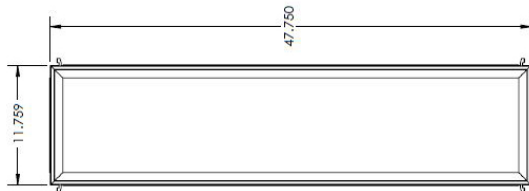

End

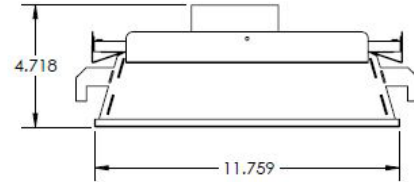

2x2

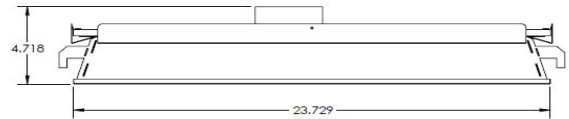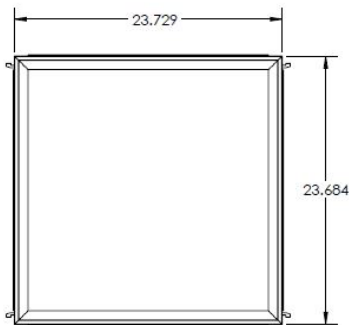

2x4

