



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series CIND

Lensed Industrial Strip

Lensed industrial strip with reflector for interior warehouse, retail, and utility areas requiring general illumination in a commercial quality strip configuration

CONSTRUCTION

Housing is die-formed and embossed code 22 gauge steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back and end of housing.

MOUNTING

Surface mount, chain hung, double stem

TYPICAL OPTIONS & ACCESSORIES

Whips, wire guards, Emergency battery backup (IOTA ILB-CP10). Contact factory for more details.



DIMENSIONS

24"L x 8.06"W x 2.00"H
48"L x 8.06"W x 2.00"H
96"L x 8.06"W x 2.00"H

FEATURES & BENEFITS

- End plate doubles as coupler for continuous row mounts.
- Suitable for dry and damp locations
- 50,000 hrs of L70 LED life
- CRI >80
- 0-10 Volts dimmable 120-277V
- Power factor 0.90
- 5 year warranty



ORDERING GUIDE

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	LENGTH	LENS MATERIAL	WATTAGE* & LUMENS*	REFLECTOR	DRIVER	COLOR/CRI**			
CIND	24L 24"	MW	Y15W	15 Watts, 2500 Lumens	W30	White Symmetrical Reflector	DMV 120-277VAC 0-10V Dimming	30K 3000K	
			Y20W	20 Watts, 3250 Lumens					
			Y25W	25 Watts, 4000 Lumens					
		FR	Y33W	33 Watts, 5200 Lumens					
			48L 48"	Y15W					15 Watts, 2500 Lumens
				Y20W					20 Watts, 3400 Lumens
	Y25W	25 Watts, 4250 Lumens							
	Y30W	30 Watts, 5200 Lumens							
	Y35W	35 Watts, 5900 Lumens							
	Y40W	40 Watts, 6650 Lumens							
	Y45W	45 Watts, 7400 Lumens							
	Y50W	50 Watts, 8150 Lumens							
	Y54W	54 Watts, 8550 Lumens							
	96L 96"	Y30W	30 Watts, 5000 Lumens	D1MV	0-10V Dimming (dim to 1%)	50K 5000K			
		Y40W	40 Watts, 6800 Lumens						
		Y50W	50 Watts, 8450 Lumens						
		Y60W	60 Watts, 10350 Lumens						
		Y70W	70 Watts, 11700 Lumens						
Y80W		80 Watts, 13300 Lumens							
Y90W	90 Watts, 14800 Lumens								
Y100W	100 Watts, 16300 Lumens								
Y108W	108 Watts, 17100 Lumens								

OPTIONS

EM14	14W Emergency battery backup (internal, excludes less than 4ft)
WP	6 ft. 3 wire 18 gauge whip
WP4	6 ft. 4 wire 18 gauge whip (non-dimming EM)
WP5W	6 ft. 5 wire 18 gauge whip
WP6W	6 ft. 6 wire 18 gauge whip (dimming EM)
BAA	Buy American Act Compliant

ACCESSORIES - Order Separately


WP	6ft. 3 wire 18 gauge whip
WP10	6ft. 4 wire 18 gauge whip
EM	10W Emergency battery backup
P11	3 wire harness
P13	5 wire harness
HC204	End mount tong hangers w/ chain
GT315	15' Dual cable gripper kit
GT310	10' Dual cable gripper kit
HC101	Chain kit
2SCS24WH	Stem mount kit

*Programmable LED drivers allow custom configured wattages and corresponding lumens.


NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

DRAWINGS & IMAGES


Back 8ft.

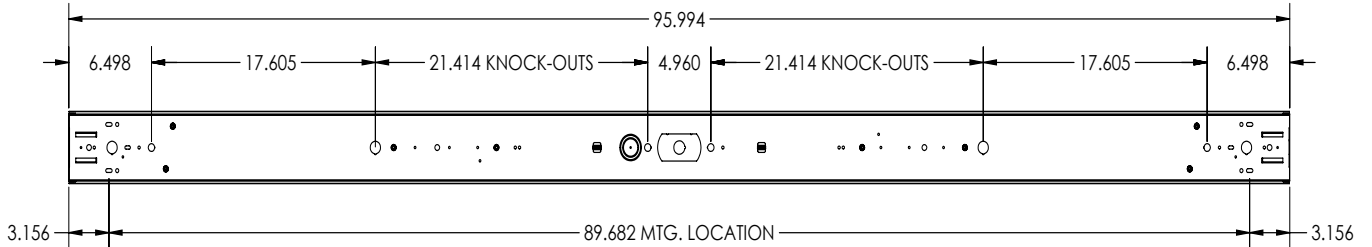

Back 4ft.

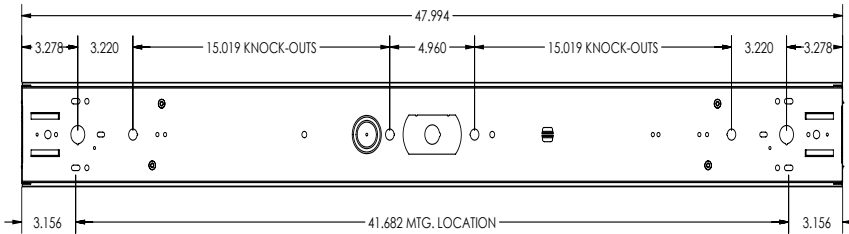

Back 2ft.

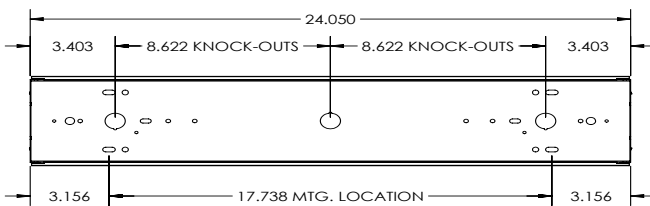

Reflector - W30

