

Series L23P

LED Pendant Mount Linear Fixture

A linear 2 x 3 fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies, and office areas, 2 x 3 Series fixtures can be installed individually or in a continuous run. Specially designed for direct/indirect lighting with snap in lens to hide the LED arrays. Ideal where downlight and uplight are required.

CONSTRUCTION

Die-formed and welded 22-gauge cold rolled steel. Knockouts on ends allow continuous wire-way mounting. Housing is specially designed for direct/indirect lighting with separating power source compartments for each.

DIFFUSERS

Specially formulated LED frosted lenses with snap in feature for easy access.

TYPICAL OPTIONS & ACCESSORIES

Cord sets, whips, occupancy sensors, hanging kits, etc.
Contact factory for more details.

DIMENSIONS

2ft.-24"L x 2"W x 3"H

4ft.-48"L x 2"W x 3"H

6ft.-72"L x 2"W x 3"H

8ft.-96"L x 2"W x 3"H

FEATURES & BENEFITS

- Pendant mount kits available
- Attractive source of direct or indirect lighting for use in offices, hallways, conference rooms and medical facilities
- Available in custom finish. Consult factory for details
- Emergency Backup options available
- Suitable for dry or damp location
- 50,000 hrs of L70 LED life
- CRI >80, consult for 90 CRI options
- 120-277V
- Power Factor 0.99
- 0-10V dimming
- 5 year warranty



ORDERING GUIDE

Up or Down Light Only

SERIES	MOUNTING	DIFFUSER	LENGTH ⁷	GEAR	DISTRIBUTIONS	WATTAGE ¹
L23	P Pendant	SF Snap-in frosted acrylic lens (85% transmission) Special for LEDs; only available for upright and downlight	24L 24"	T	BLANK Downlight Only U Uplight Only	8W 8 Watts, 900 Lumens 12W 12 Watts, 1300 Lumens 18W 18 Watts, 2000 Lumens 23W 23 Watts, 2500 Lumens
			48L 48"			16W 16 Watts, 1800 Lumens 24W 24 Watts, 2600 Lumens 36W 36 Watts, 4000 Lumens 45W 45 Watts, 5000 Lumens
			72L 72"			24W 24 Watts, 2600 Lumens 36W 36 Watts, 4000 Lumens 54W 54 Watts, 5900 Lumens 68W 68 Watts, 7500 Lumens
			96L 96"			32W 32 Watts, 3500 Lumens 48W 48 Watts, 5300 Lumens 72W 72 Watts, 7900 Lumens 90W 90 Watts, 10000 Lumens

DRIVER	FINISH ⁴	CRI/CCT ⁵	CONFIGURATION	EMERGENCY ⁶
DMV 120-277VAC 0-10V Dimming	WH White BK Black	30K 3000K 80 CRI	Blank Individual	EM14 14W Emergency battery backup (integrated in fixtures 4' and longer)
G120 ELV/TRIAC Dimming at 120V only	SL Silver ** Custom Color	35K 3500K 80 CRI	-B Beginner Run	
D1MV 120-277VAC 0-10V Dimming (dim to 1%)		40K 4000K 80 CRI	-E Ender Run	
SRMV 120-277VAC Phillips Sensor-Ready		50K 5000K 80 CRI	-J Joiner	
DALMV 120-277VAC DALI Dimming		930K 3000K 90 CRI		
		935K 3500K 90 CRI		
		940K 4000K 90 CRI		

HANGING KIT	SENSOR
HC301WH Cable kit with 4' cable & 3 wires power feed/cable incl. and white canopy	Blank No Sensor
HC302WH Cable kit with 12' cable & 3 wires power feed/cable incl. and white canopy	SS On/Off Sensor
HC3015WWH Cable kit with 4' cable & 5 wires power feed/cable incl. and white canopy	SV Bi-Level Sensor
HC3025WWH Cable kit with 12' cable & 5 wires power feed/cable incl. and white canopy	SD Daylight Harvesting Sensor
HC3016WH Cable kit with 4' cable & 6 wires power feed/cable incl. and white canopy	SM Microwave Sensor
HC3026WH Cable kit with 12' cable & 6 wires power feed/cable incl. and white canopy	
2SCS24WH Two stem kits with 24" stem, canopy and mounting hardware for a 4' fixture	

Note:

1. Programmable LED drivers allow custom configured wattages and corresponding lumens.
2. For Uplight and Downlight combination for 2' or less Individual Configuration Luminaire, consult factory for more information.
3. 11 - Uplight and Downlight separate dimming/control for 2' or less Individual Configuration Luminaire, consult factory for more information. Do not apply for Up or Down light only configurations.
4. **RAL custom finishes available. Consult factory for more information or pricing requests.
5. Consult factory for 90 CRI 5000K availability.
6. Only Remote EM available in 2' or less luminaire.
7. Consult factory for custom lengths.

Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

ORDERING GUIDE

Up and Down Light

SERIES	MOUNTING	DIFFUSER	LENGTH ⁷	GEAR	UP and DOWN LIGHT CONFIGURATIONS ¹			
L23	P Pendant	SF Snap-in frosted acrylic lens (85% transmission) Special for LEDs; only available for uplight and downlight	24L 24"	T	U6W	6 Watts, 700 Lumens	D12W	12 Watts, 1300 Lumens
					U9W	9 Watts, 1000 Lumens	D18W	18 Watts, 2000 Lumens
					U12W	12 Watts, 1300 Lumens	D23W	23 Watts, 2500 Lumens
			48L 48"		U8W	8 Watts, 900 Lumens	D16W	16 Watts, 1800 Lumens
					U12W	12 Watts, 1300 Lumens	D24W	24 Watts, 2600 Lumens
					U18W	18 Watts, 2000 Lumens	D36W	36 Watts, 4000 Lumens
					U23W	23 Watts, 2500 Lumens	D45W	45 Watts, 5000 Lumens
			72L 72"		U12W	12 Watts, 1300 Lumens	D24W	24 Watts, 2600 Lumens
					U18W	18 Watts, 2000 Lumens	D36W	36 Watts, 4000 Lumens
					U27W	27 Watts, 2900 Lumens	D54W	54 Watts, 5900 Lumens
					U34W	34 Watts, 3700 Lumens	D68W	68 Watts, 7500 Lumens
			96L 96"		U16W	16 Watts, 1800 Lumens	D32W	32 Watts, 3500 Lumens
					U24W	24 Watts, 2600 Lumens	D48W	48 Watts, 5300 Lumens
					U36W	36 Watts, 4000 Lumens	D72W	72 Watts, 7900 Lumens
					U45W	45 Watts, 5000 Lumens	D90W	90 Watts, 10000 Lumens

DRIVER		UP/DOWN CONTROL ²		FINISH ⁴		CRI/CCT ⁵		CONFIGURATION		EMERGENCY ⁶	
DMV	120-277VAC 0-10V Dimming	Blank	Paired Up/Down Dimming+control	WH	White	30K	3000K 80 CRI	Blank	Individual	EM14	14W Emergency battery backup (integrated in fixtures 4' and longer)
G120	ELV/TRIAC Dimming at 120V only	11 ³	Separate Up/Down Dimming+control	BK	Black	35K	3500K 80 CRI	-B	Beginner Run		
D1MV	120-277VAC 0-10V Dimming (dim to 1%)			SL	Silver	40K	4000K 80 CRI	-E	Ender Run		
SRMV	120-277VAC Phillips Sensor-Ready			**	Custom Color	50K	5000K 80 CRI	-J	Joiner		
DALMV	120-277VAC DALI Dimming					930K	3000K 90 CRI				
						935K	3500K 90 CRI				
						940K	4000K 90 CRI				


HANGING KIT		SENSOR	
HC301WH	Cable kit with 4' cable & 3 wires power feed/cable incl. and white canopy	Blank	No Sensor
HC302WH	Cable kit with 12' cable & 3 wires power feed/cable incl. and white canopy	SS	On/Off Sensor
HC3015WWH	Cable kit with 4' cable & 5 wires power feed/cable incl. and white canopy	SV	Bi-Level Sensor
HC3025WWH	Cable kit with 12' cable & 5 wires power feed/cable incl. and white canopy	SD	Daylight Harvesting Sensor
HC3016WH	Cable kit with 4' cable & 6 wires power feed/cable incl and white canopy	SM	Microwave Sensor
HC3026WH	Cable kit with 12' cable & 6 wires power feed/cable incl and white canopy		
2SCS24WH	Two stem kits with 24" stem, canopy and mounting hardware for a 4' fixture		

Note:

1. Programmable LED drivers allow custom configured wattages and corresponding lumens.
2. For Uplight and Downlight combination for 2' or less Individual Configuration Luminaire, consult factory for more information.
3. 11 - For Uplight and Downlight separate dimming/control for 2' or less Individual Configuration Luminaire, consult factory for more information.
4. **RAL custom finishes available. Consult factory for more information or pricing requests.
5. Consult factory for 90 CRI 5000K availability.
6. Only Remote EM available in 2' or less luminaire.
7. Consult factory for custom lengths.


Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

PENDANT MOUNT DRAWINGS AND DIMENSIONS

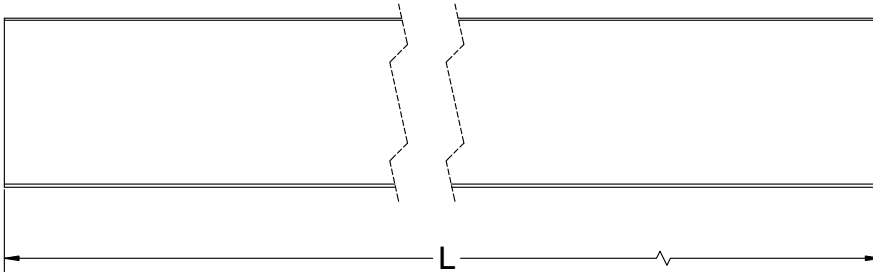

PART	L	W	H	X	Y	L-Length W-Width H-Height X-Knock Out Distance Y-Hanging Kit Distance
L23P24L	24.00"	2.00"	3.00"	0.80"	1.55"	
L23P48L	48.00"	2.00"	3.00"	0.80"	1.55"	
L23P72L	72.00"	2.00"	3.00"	0.80"	1.55"	
L23P96L	96.00"	2.00"	3.00"	0.80"	1.55"	

End Side View

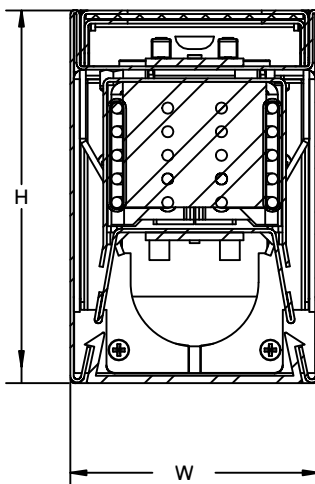

End Top View

