

PROJECT:

#### TYPE:

# **SAP Series**

### Spoke Acoustic Pendant

The SAP Series fixtures utilize modern designs and simplistic LED luminaires to produce decadent beauty and efficient illumination. There are three design styles for the acoustic material available: triangular, circular, and rectangular. The acoustic materials used have a Class A or B flammability rating. The central luminaire is pendant mounted with aircraft cables and provides a soft, even glow. The SAP Series provides an excellent opportunity to elevate the lighting and style of your space. Spoke Acoustic Pendant fixtures are great for conference rooms, lobbies, and other high traffic areas.

#### CONSTRUCTION

Acoustic material is 100% PET containing at least 55% recycled content. Class B fire rating and moisture resistant.



#### FIXTURE DIMENSIONS

Circular: 34" Dia. x 26"H Triangular: 43"Dia. x 25"H Rectangular: 34"Dia. x 26"H

#### SPECIFICATIONS

- Pendant mount accommodates most ceiling types
- 10' max length hanging kit included
- CRI >90
- >50,000 hrs of L70 LED life
- Rated for dry and damp locations
- 0-10 Volt dimmable 120-277V
- Power factor >0.90
- 5 year warranty





PROJECT:

TYPE:

# **SAP Series**

Architectural LED Spoked Acoustic Pendant

#### **ORDERING GUIDE**

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration. Sample Part Number: SAP-25-D27-DMV-BN-930K-A03-T

SERIES	DIAMETER		WATTAGE	DRIVER	FINISH	CCT	FLAIR <sup>1</sup>
SAP	<b>34</b> 34 (-C)	" Dia. D	027 27 Watts 2,400 Lumens	DMV 0-10V Dimming	BN Brushed Nickel	<b>30K</b> 3000K 90 CRI	<ul><li>03 Light Gray</li><li>17 Dark Gray</li></ul>
	<b>34</b> 34 (-R)	" Dia.		G120 Triac/ELV Dimming at	BK Black		05 Dark Green 02 Taupe
	<b>44</b> 44 (-T)	" Dia.		120V only			<b>34</b> Pure Gray

	CONFIGURATION	MATERIAL CLASS		
-T	Triangular	Blank	Class B	
-R	Rectangular	Α	Class A	
-C	Circular			
-0	onoului			

Note:

1. Consult factory for more acoustic material color options.

\*Programmable LED drivers allow custom configured wattages and corresponding lumens.

\*\* Consult factory for 90 CRI 5000K availability.

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.



PROJECT:

TYPE:

# **SAP Series**

Architectural LED Spoked Acoustic Pendant

### ACOUSTIC MATERIAL COLOR OPTIONS - 12mm PET Feit



77-12 Heathered Violet




17-12 Dark Gray



U3-12 Light Gray



10-12 True Black





71-12 Heathered Granite



34-12 Pure Gray



63-12 Medium Gray



02-12 Taupe



68-12 Heathered



05-12 Dark Green



74-12 Heathered Slate



73-12 Heathered Mustard



72-12 Heathered Lagoon



75-12

Heathered

Oatmeal

39-12 Green Apple



76-12 Heathered Teal



70-12 Heathered Foliage



21-12 Indigo Blue




PROJECT:

TYPE:

# **SAP** Series

Architectural LED Spoked Acoustic Pendant

### **PRODUCT DIMENSIONS - TRIANGULAR**

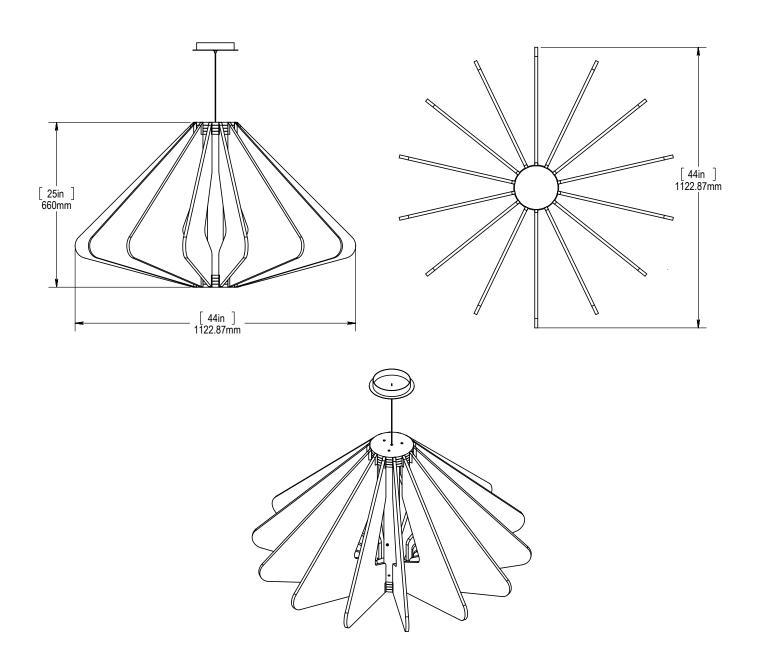




PROJECT:


TYPE:

# **SAP Series**

Architectural LED Spoked Acoustic Pendant

### **PRODUCT DIMENSIONS - CIRCULAR**

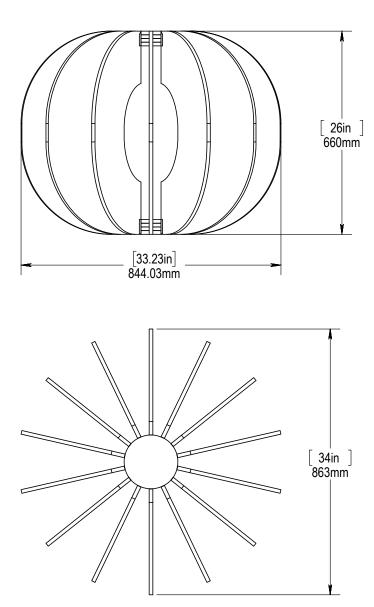





PROJECT:

TYPE:

# **SAP Series**

Architectural LED Spoked Acoustic Pendant

### **PRODUCT DIMENSIONS - RECTANGULAR**

