

CATALOG# : _____

PROJECT : _____

TYPE : _____

CUR Series

Curved Lens Recessed Troffer

The CUR Series provides soft, efficient lighting and is a perfect fit for offices, lobbies, and retail spaces. CUR fixtures create a clean, professional look that can accompany varying aesthetics and styles. The added wattage dimming and color selection switch gives customers several light options to meet the requirements of any space.

CONSTRUCTION

Fixture housing is made of 22 gauge steel, powder coated with high reflectance white paint to provide optimal light output.

MOUNTING

CUR fixtures are designed for grid mounting only.



FIXTURE DIMENSIONS

22L: 23.778"W x 23.880"L x 4.5"H

24L: 23.778"W x 47.880"W x 4.5"H

SPECIFICATIONS

- 2 standard sizes – 2ft x 2ft & 2ft x 4ft
- Many lumen package / wattage options via 4 position switch
- Multiple Kelvin temperature options (3000K, 3500K, 4000K) via 3 position switch
- Emergency battery backup options available
- CRI >80
- >50,000 hrs of L70 LED life
- Rated for dry and damp locations
- 0-10 Volt dimmable 120-277V
- Power factor >0.90
- 5 year warranty





CATALOG# : _____
 PROJECT : _____
 TYPE : _____

CUR Series

Curved Lens Recessed Troffer

ORDERING GUIDE

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

Sample Part Number:

SERIES	DIFFUSER	WIDTH X LENGTH	WATTAGE*1	DRIVER	CCT/CRI
CUR	FR Frosted	22L 24"W x 24"L	P45M4950M Defaulted 45 Watts / 4950 Lumens 45 Watts / 4950 Lumens, 36 Watts / 3960 Lumens, 27 Watts / 2970 Lumens, 20 Watts / 2200 Lumens options on a 4-positions switch.	DMV 120-277VAC 0-10V Dimming	MCT Multiple Color Temperature 3000K, 3500K, 4000K on a 3- positions switch
		24L 24"W x 48"L	P55M6050M Defaulted 55 Watts / 6050 Lumens 55 Watts / 6050 Lumens, 44 Watts / 4840 Lumens, 33 Watts / 3630 Lumens, 25 Watts / 2750 Lumens options on a 4-positions switch.		

EMERGENCY

EM 14W Emergency
Battery Backup


Note:

1. Wattage and lumen values shown for 40K color temperature selection. Other color temperatures can affect lumen output and wattage draw.

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

PRODUCT DIMENSIONS

2X2

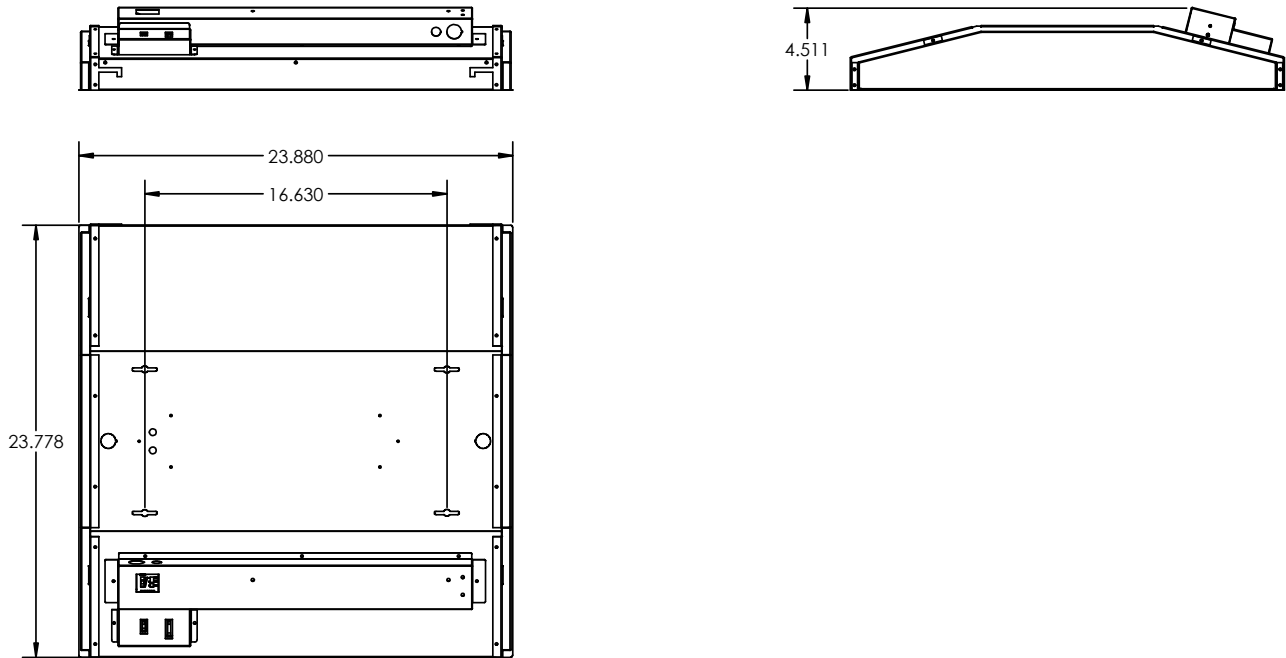

2X4

