

# Series STW

## LED Stairwell

Specification grade, wall mount with forward throw optics, the SSSTW is a sleek wall mount. This stairwell fixture is ideal for brightening perimeters of offices or spectacular wall lighting systems for corridors.

### CONSTRUCTION

Housing is die-formed and embossed code gauge steel with aluminum end caps. Standard finish is powder coat white. Custom colors available

### MOUNTING

Wall mount

### TYPICAL OPTIONS & ACCESSORIES

Smart Sense(Ultrasonic technology for open area detection and line-o-sight obstructions.), pull chain, emergency battery backup (for 2ft. housing, remote EM only) and custom colors.

### DIMENSIONS


2ft - 5.613"Wx24"Lx4.5781"Dp  
4ft - 5.613"Wx48.878"Lx4.5781"Dp

### FEATURES & BENEFITS


- Continuous row mounting
- Post painted powder coat finish
- White standard, custom colors available
- Suitable for dry and damp locations
- 50,000 hrs of L70 LED life
- CRI >80
- 0-10 Volt dimmable 120-277V
- Power factor 0.99
- 5 year warranty

## DRAWINGS & IMAGES


### 2 FT

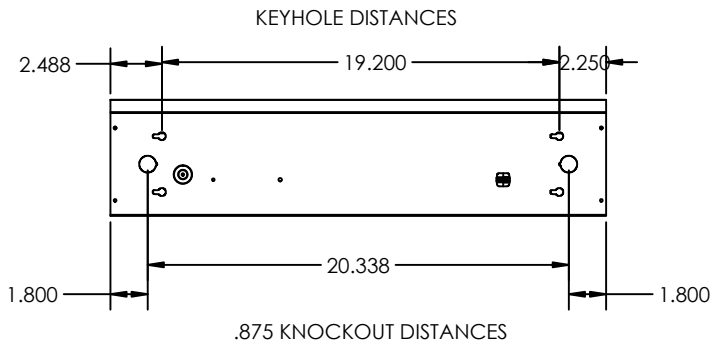

### End View

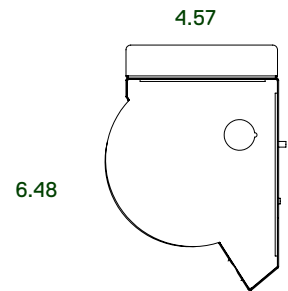

### 4 FT

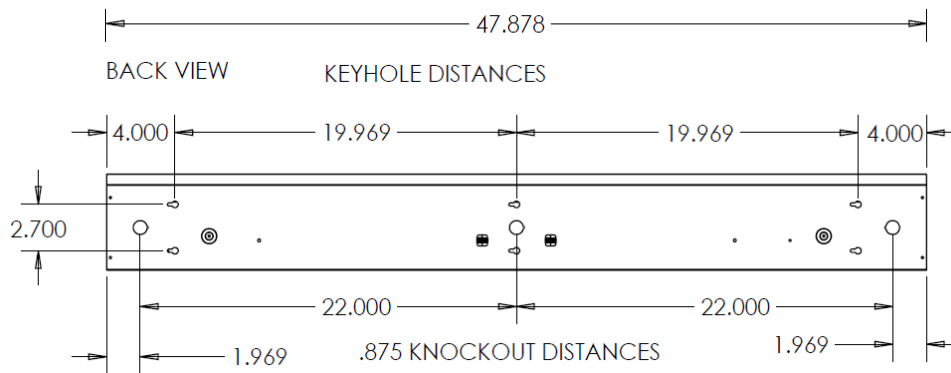

### Smart Sensor Option



### Pull Chain Option



CATALOG# :

PROJECT :

TYPE :

## Series STW

### LED Stairwell

### ORDER INFORMATION

SERIES	LENS	SIZE	WATTAGE <sup>1</sup>	DRIVER	COLOR	ACCESSORIES
STW LED Stairwell	FR Frosted lens	24L 24"	<b>Up and Down</b> <b>UY6WD12W</b> Uplight 6 Watts Downlight 12 Watts 1800 Lumens <b>UY12WD24W</b> Uplight 12 Watts Downlight 24 Watts 3600 Lumens	<b>DMV</b> 0-10V Dimming Input Voltage 120V - 277V  <b>DMV(XX)*</b> Input Voltage 120V - 277V	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K	<b>PC4</b> 4 Way Pull Chain
		48L 48"	<b>Down Light Only</b> <b>Y15W</b> 15 Watts 2050 Lumens <b>Y20W</b> 20 Watts 2500 Lumens <b>Y24W</b> 24 Watts 3000 Lumens <b>Y29W</b> 29 Watts 3600 Lumens  <b>Up and Down</b> <b>UY12WD24W</b> Uplight 12 Watts Downlight 24 Watts 3600 Lumens <b>UY24WD48W</b> Uplight 24 Watts Downlight 48 Watts 7200 Lumens  <b>Down Light Only</b> <b>Y30W</b> 30 Watts 4100 Lumens <b>Y40W</b> 40 Watts 5000 Lumens <b>Y48W</b> 48 Watts 6000 Lumens <b>Y57W</b> 57 Watts 7125 Lumens	*(XX) for Percentage of Light Output when it is not Occupied.		
SSSTW Smart Sensor LED Stairwell						

OPTIONS	
EM14	14W Emergency Battery Backup 90mins
EM20	20W Emergency Battery Backup 90mins

Note:

<sup>1</sup>Programmable LED drivers allow custom configured wattages and corresponding lumens.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.