



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series 66RF/RRPF

LED Recessed Mount Linear Fixture

A linear 6 x 6 fixture for distinctive architectural lighting plans. Ideal for corridors, lobbies, and office areas, 6 x 6 Series fixtures can be installed individually or in a continuous run. Specially designed for direct light only with snap in lens to hide the LED arrays. Ideal for corridors, lobbies, and office areas, etc.

CONSTRUCTION

Die-formed and welded 22-gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting. Housing is specially designed for smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations.

DIFFUSERS

Fixture accepts various lenses or louvers. 4' and 8' units have a steel mullion to join two individual diffusers.

TYPICAL OPTIONS & ACCESSORIES

Cord sets, whips, occupancy sensors. Contact factory for more details.



DIMENSIONS

- 2ft. -23.45"L x 5.75"W x 6"H
- 4ft. -48"L x 5.75"W x 6"H
- 8ft. -96"L x 5.75"W x 6"H

FEATURES & BENEFITS

- Can be recessed mounted into ceiling.
- Consult factory for custom length or custom finish
- Can be used individually or in continuous row
- Light is continuous bringing a clean line
- Suitable for commercial or residential areas
- CRI >80 (90 CRI avail)
- >50,000 hrs of L70 LED life
- 0-10 Volt dimmable 120-277V (120 ELV/Triac avail)
- Power factor >0.90
- IC Rated for dry and damp locations
- 5 year warranty



ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	LENS MATERIAL	LENGTH	GEAR	WATTAGE & LUMENS ¹	DRIVER
66RF Flanged for Existing Drywall Installation	SF Snap-in Frosted Acrylic lens (85% transmission) Special for LEDs; only available for upright and down-light	24L 23.45"	LR	12W 12 Watts, 1200 Lumens	DMV 120-277VAC 0-10V Dimming
				24W 24 Watts, 2400 Lumens	G120 ELV/TRIAC Dimming at 120V only
48L 48"		24W 24 Watts, 2400 Lumens		D1MV 120-277VAC 0-10V Dimming (dim to 1%)	
		48W 48 Watts, 4800 Lumens		SRMV 120-277VAC Phillips Sensor-Ready	
66RRPF Perforated Flange for Existing Drywall Installation + Mud Over Flangeless Finish		96L 96"		48W 48 Watts, 4800 Lumens	DALMV 120-277VAC DALI Dimming
				96W 96 Watts, 9600 Lumens	

FINISH ²		CCT/CRI ³	CONFIGURATION	EMERGENCY	SENSOR	
WH	White	30K 3000K 80 CRI	Blank Individual	EM14 14W Emergency battery backup (integrated in fixtures 4' and longer)	SS	On/Off Sensor
BK	Black	35K 3500K 80 CRI	-B Beginner Run	CP Chicago Plenum	SV	Bi-Level Sensor
SI	Silver	40K 4000K 80 CRI	-E Ender Run		SD	Daylight Harvesting Sensor
		50K 5000K 80 CRI	-J Joiner		SM	Microwave Sensor
		930K 3000K 90 CRI				
		935K 3500K 90 CRI				
		940K 4000K 90 CRI				


Note:

1. Programmable LED drivers allow custom configured wattages and corresponding lumens.
2. RAL custom finishes available. Consult factory for more information or pricing requests.
3. Consult factory for 90 CRI 5000K availability.

DRAWINGS & IMAGES


**RECESSED MOUNT (RF/RRPF)
DRAWINGS & DIMENSIONS**

End Side View

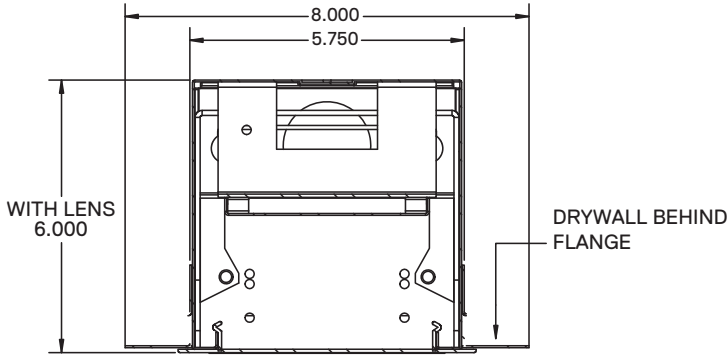

RF - Flange Appearance

4FT-RF/RRPF

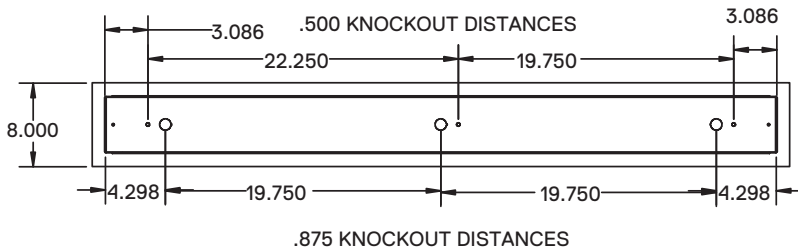

8FT-RF/RRPF

