



CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

# Series EWP

## LED Engineered Heavy-Duty Wraparound w/Solid Ends

Heavy duty construction ideal for individual or continuous runs with solid ends. Engineered wraparound high efficiency luminaire available in four or eight foot lengths. Low initial cost, maintenance free, this series also delivers excellent brightness control.

### CONSTRUCTION

Completely die-formed from heavy gauge cold rolled steel. Design embossed ends are locked and secures to the housing. Wireway cover snaps on or off without tools.

### DIFFUSERS

A crystal clear diffuser extruded from 100% virgin acrylic that will maintain its color under normal conditions, indefinitely. Linear prisms on the interior side walls direct the light ceilingwards, which can then refract back down. The bottom is composed of an evenly spaced pattern of conical prisms yielding low brightness, glarefree diffused light. Diffuser is lift and shift for ease of relamping and cleaning and is capable of hanging down from either side of the housing.

### MOUNTING

Suitable for individual or continuous run installations. May be surface or pendant mounted.

### TYPICAL OPTIONS & ACCESSORIES

EM - Emergency battery backup, WP - whips. Contact factory for more details.



### DIMENSIONS

4ft - 48"L x 9.56"W x 3.19"H  
8ft - 96"L x 9.56"W x 3.19"H

### FEATURES & BENEFITS

- CRI >80 standard, 90 optional
- L70: >50,000 Hours
- Dimming: 0-10V 120-277V standard, 120V ELV/TRIAC optional
- Power factor >0.90
- 5 year warranty
- 10 year warranty option available





CATALOG#: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

# Series EWP

LED Engineered Heavy-Duty  
 Wraparound w/Solid Ends

## ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	LENS	LENGTH	WATTAGE* & LUMENS*	DRIVER	COLOR/CRI**		
EWP LED Engineered Heavy Duty Wraparound	LR Linear ribbed lens	48L 48"	Y32W	32 Watts 5000 Lumens	DMV	0-10V Dimming	30K 3000K
			Y48W	48 Watts 7200 Lumens	G120	ELV/TRIAC Dimming at 120V only	35K 3500K
			Y72W	72 Watts 11000 Lumens	D1MV	0-10V Dimming (dim to 1%)	40K 4000K
	FR Frost Lens***	96L 96"	Y48W	48 Watts 7500 Lumens			50K 5000K
			Y65W	65 Watts 9700 Lumens			930K 3000K 90 CRI
			Y97W	97 Watts 14500 Lumens			935K 3500K 90 CRI
							940K 4000K 90 CRI

OPTIONS	CONFIGURATION
EM14 14W Emergency battery backup for 90 mins	-B Beginner -J Joiner -E Ender

\*Programmable LED drivers allow custom configured wattages and corresponding lumens.


\*\* Consult factory for 90 CRI 5000K availability.

\*\*\*Replacement frost lens part number: ROTDOMEWRAP4FTLENSFR


**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

**DRAWINGS & IMAGES**

**Back  
 4ft**

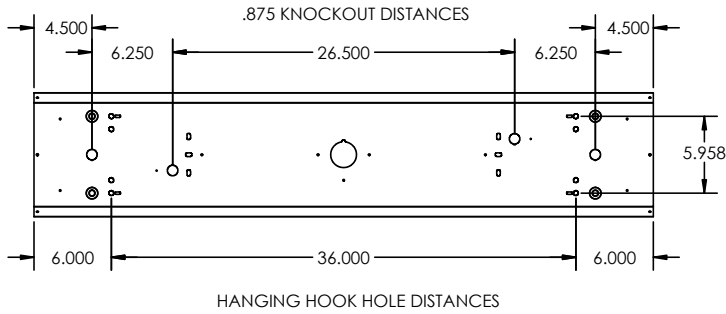

**8ft**

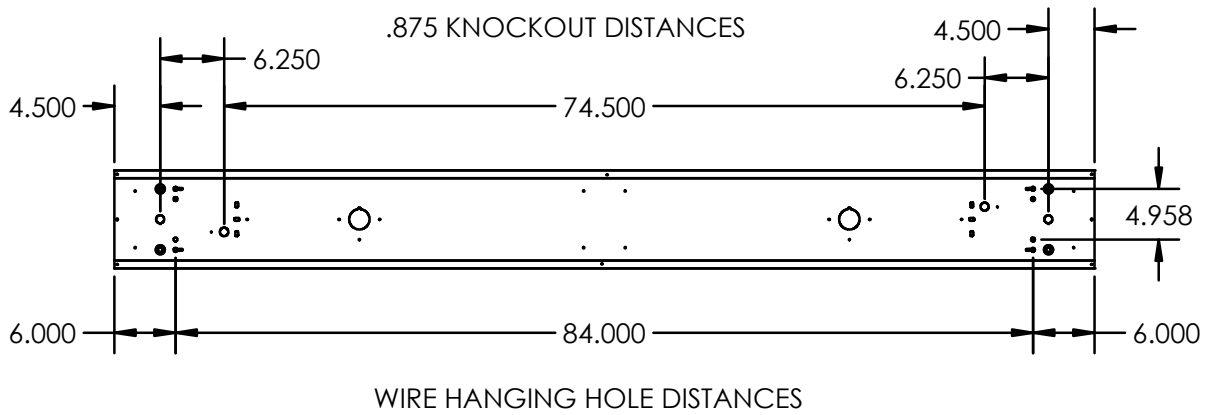

**End**

