

| С | Α | Т | Α | L | 0 | G | # |
|---|---|---|---|---|---|---|---|

PROJECT:
TYPE:

# **RFSF Series**

### LED Medium Body Retrofit Strip w/Lens

This high-performance retrofit strip fixture is now available with a lens. The RFSF Series offering is perfect for many applications including: retail, industrial, and back of house applications. RFSF fixtures are designed and manufactured economically, yet balances sleek aesthetics and function. This fixture is perfect for Mezzanine and low ceiling installations where a wide distribution light pattern is needed.

#### CONSTRUCTION

Pan is cold rolled 22 gauge white steel with high reflectance baked white enamel finish.

#### **MOUNTING**

Surface mount, chain hung, or double stem mounted.

#### TYPICAL OPTIONS AND ACCESSORIES

Whips, wireguards, and emergency battery backups available. Contact factory for more options.

FIXTURE DIMENSIONS

2ft: 4.25W x 24.00L x 3.25H 4ft: 4.25W x 48.00L x 3.25H 8ft: 4.25W x 96.00L x 3.25H

#### **SPECIFICATIONS**

- 3 standard lengths 2ft, 4ft, 8ft
- Surface, chain, or stem mount kits adapt to most ceiling types
- Many lumen package / wattage options via programmable drivers
- Multiple Kelvin temperature options (3000K, 3500K, 4000K, 5000K)
- Emergency battery backup options available
- CRI >80
- >50,000 hrs of L70 LED life
- 0-10 Volt dimmable 120-277V
- Power factor >0.90
- 5 year warranty









| CATALOG#: |  |  |
|-----------|--|--|
| PROJECT:  |  |  |
| TYPF:     |  |  |

## **RFSF Series**

LED Medium Body Retrofit Strip w/Lens

#### **ORDERING GUIDE**

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration. Sample Part Number: RFSF-FR-24L-Z24W2400L-DMV-30K

| SERIES              | DIFF | USER            | LEI | NGTH | W           | WATTAGE* DRIVER          |     | DRIVER                      |     | CCT/CRI         |  |
|---------------------|------|-----------------|-----|------|-------------|--------------------------|-----|-----------------------------|-----|-----------------|--|
| RFSF<br>Medium Body | FR   | Frosted<br>Lens | 24L | 24"L | Y12W1200L   | 12 Watts<br>1,200 Lumens | DMV | 120-277VAC<br>0-10V Dimming | 30K | 3000K<br>80 CRI |  |
| Retrofit Strip      |      |                 |     |      | Y24W2400L   | 24 Watts                 |     |                             | 35K | 3500K<br>80 CRI |  |
|                     |      |                 |     |      |             | 2,400 Lumens             |     |                             | 40K | 4000K<br>80 CRI |  |
|                     |      |                 | 48L | 48"L | Y24W2600L   | 24 Watts<br>2,600 Lumens |     |                             | 50K | 5000K<br>80 CRI |  |
|                     |      |                 |     |      | Y48W5400L   | 48 Watts<br>5,400 Lumens |     |                             |     |                 |  |
|                     |      |                 |     |      | Y57W6200L   | 57 Watts<br>6,200 Lumens |     |                             |     |                 |  |
|                     |      |                 | 96L | 96"L | Y62W6600L   | 62 Watts<br>6,120 Lumens |     |                             |     |                 |  |
|                     |      |                 |     |      | Y114W12400L | 114 Watts<br>9315 Lumens |     |                             |     |                 |  |

|      | OPTIONS                      |
|------|------------------------------|
| WP   | 6 ft. 3 wire 18 gauge whip   |
| WP10 | 6 ft. 4 wire 18 gauge whip   |
| EM   | 14W Emergency Battery Backup |
| PI1  | 3 Wire Harness               |
| PI3  | 5 Wire Harness               |

**NOTE:** Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

<sup>\*</sup>Programmable LED drivers allow custom configured wattages and corresponding lumens.




3.28


| CATALOG#: |  |
|-----------|--|
| PROJECT:  |  |
| TYPE:     |  |

### **RFSF Series**


LED Medium Body Retrofit Strip w/Lens


#### **PRODUCT DIMENSIONS**







HANGING DIMENSIONS



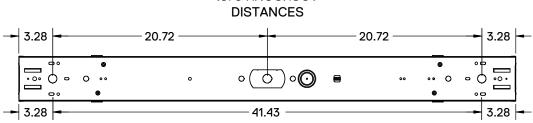

HANGING DIMENSIONS



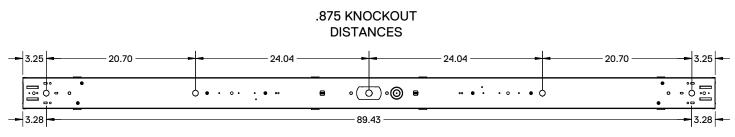

HANGING DIMENSIONS