

# Series CEU

## Low Profile All LED Exit & Emergency Combo

LED powered Exit sign and Emergency light combos helps in keeping your facility code-compliant and occupants safe. These units are low maintenance and remote capable option available. It is perfect for many applications including damp location.

### CONSTRUCTION

Adjustable long, lasting, efficient ultra bright white LED lamp heads. One 0.5W white LED per lamp head. Dual 120V/277V voltage standard. Optional dual 120V/230V available. Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery). 3.6V long life, maintenance free, rechargeable NiCd battery. Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90 minute emergency illumination. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

EZ-snap mounting thermoplastic mounting canopy included - provides top or end mount. Universal K/O pattern on back plate for wall mount

### TYPICAL OPTIONS & ACCESSORIES

SPV: UL Listed for special voltage option



### DIMENSIONS


16.0"W x 7.25"H x 1.95"Dp

### FEATURES & BENEFITS


- Remote capacity option available
- Unique all inclusive lamp, reflector and lens assembly
- Long lasting, energy efficient Red or Green LED Exit sign illumination
- UL Listed for damp locations (0°C-30°C)
- One year warranty on all electronics and housing.

## DRAWINGS & IMAGES

### Side

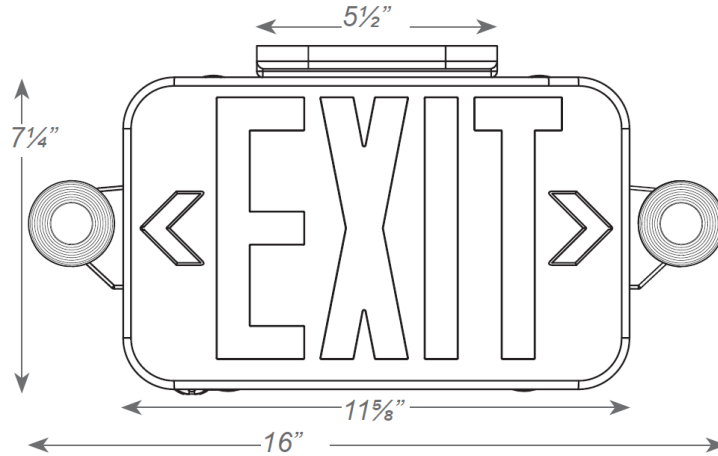

### End

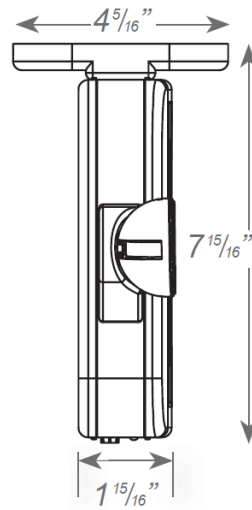

## ORDER INFORMATION

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	LAMPHEAD	OPTIONS
CEU	3 Universal Single/Double	R Red G Green	W White B Black	HL <sup>1</sup> High-Lumen LED	RC Remote capable (standard) SPV 120/230 Volt 50/60Hz

Note:

<sup>1</sup>HL cannot be paired with remote capable option.

## ELECTRICAL INFORMATION

CATALOG #	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
CEU RED	1.1	1.2	1.3	0.08	0.09	0.09
CEU RED RC	1.6	1.6	1.6	0.12	0.11	0.11
CEU GREEN	1.1	1.2	1.3	0.08	0.09	0.09
CEU GREEN RC	1.6	1.6	1.6	0.12	0.11	0.11

## REMOTE LAMP COMPATIBILITY

MODEL #	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
CEU-RC		1W	RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED
	3.6V		9.6V	MV	6V		12V	6V	12V	6V	12V	6V	12V		
	X			X											

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.