



CATALOG#: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

# Series KXTEU

## Die-Cast Aluminum LED Exit Sign



### ILLUMINATION

- Ultra-bright, energy efficient, long life Red or Green LED.

### ELECTRICAL

- Dual 120-277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

### MOUNTING

- Aluminum mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

### HOUSING

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes)
- Field selectable knockout Chevron directional indicators
- Unique design allows double face conversion in the field
- Quick-snap face plate closure

### WARRANTY

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- 5 year warranty on all electronics and housing. Battery pro-rated for five years.

### OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C-120V/2C-277V: Dual circuit option on the AC-only unit enables it to be connected to two different power supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

### DIMENSIONS

12 5/8"L x 2"W x 8 3/8"H

### OPTIONS

- TP: Tamper-proof hardware helps prevent unauthorized access to the unit
- SD: Self diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes
- Local and life safety codes.
- 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act. UL Listed for damp locations (0°C-50°C)

#### STANDARD



#### OPTIONAL




**ORDER INFORMATION**

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	FACE	BATTERY	OPTIONS
KXTEU	1	Single Face	R Red	W White	W White	TP Tamper-Proof
	2	Double Face	G Green	B Black	B Black	SDT Self-diagnostics
	3	Universal Single/ Double Face		A Aluminum	A Aluminum	2C-120 Dual Circuit with 120V input 2C-277 Dual Circuit with 277V input USA Assembled in USA

**DRAWINGS**

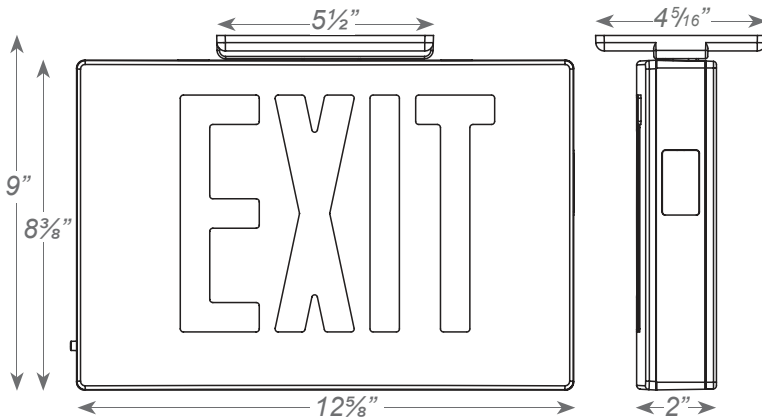

**ELECTRICAL INFORMATION**

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277
KXTEU-RED/EM/2C/SDT	3.2	3.6	0.031	0.019
KXTEU-GREEN/EM/2C/SDT	3.8	4.4	0.033	0.017

Note:  
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.