

CATALOG#:

PROJECT:

TYPE:



### THL Series

### Commercial LED Highbay

The THL Series creates a new opportunity to transform your space with cost efficient LED highbay fixtures. THL Series fixtures are ideally suited for warehouses, manufacturing plants, sports facilities and retail spaces. A precision-formed reflector is combined with high output LED strips to provide maximum light output for ceilings from 15 feet to 40 feet. This arrangement is ideal for wide area lighting to put the light exactly where you need it with less fixtures.

#### CONSTRUCTION

Air vents surround the drivers in the back of the fixture to maximize LED and driver performance, reliability and life. High reflective enhanced white reflectors are computer designed to maximize photometric performance and put the light where you need it. Access plate in the back makes wiring fast and hassle-free.

FIXTURE DIMENSIONS

20X24L: 23.00"W x 24.02"L x 2.66"H 20X48L: 23.00"W x 48.04"L x 2.66"H

#### **SPECIFICATIONS**

- Pendant or chain mount for high ceilings
- Many lumen package / wattage options via programmable drivers
- Multiple Kelvin temperature options (3000K, 3500K, 4000K, 5000K)
- Emergency battery backup options available
- · CRI >80
- >50,000 hrs of L70 LED life
- 50C Max. ambient temperature
- Rated for dry and damp locations
- 0-10 Volt dimmable 120-277V (347-480V/120V ELV/TRIAC avail)
- Power factor >0.90
- 5 year warranty







CATALOG#:		
PROJECT:		
TYPE:		

# THL Series Commercial LED Highbay

#### **ORDERING GUIDE - 120-277V**

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration. Sample Part Number: THL-P-FR-20X24L-B-125-DMV-WH-30K

SERIES	MOUNTING	DIFFUSER	WIDTH X LENGTH	GEAR	WATTAGE*1		WATTAGE*1		WATTAGE*1		DRIVER	
SERIES THL	MOUNTING P Pendant		WIDTH X LENGTH  20X24L 23"W × 24"L  20X48L 23"W × 48"L	В	105 125 165 210 250 285 325 360	WATTAGE*1  105 Watts 14,944 Lumens 125 Watts 18,184 Lumens 165 Watts 23,701 Lumens 210 Watts 30,568 Lumens 250 Watts 35,336 Lumens 285 Watts 41,080 Lumens 325 Watts 47,464 Lumens 360 Watts 52,470 Lumens	DMV	DRIVER  120-277VAC 0-10V Dimming				
					360	,						

FIN	IISH	С	СТ	OF	PTIONS and EMERGENCY2
WH	White	30K	3000K	EM14	14W Emergency battery backup
		35K	3500K	EM20	20W Emergency battery backup
		40K	4000K	MDT4	ON/OFF Occupancy Sensor
		50K	5000K	MDB3	Low Mount 360° Bi-level with 0-10V
				PC120	120V Photo Cell
				PC277	277V Photo Cell
				CS08	8' Power Cord
				WP	6' 3 Wire Whip
				WP10	6' 4 Wire Whip
				HC101	Chain kit w/20' chain & (6) S Hooks
				HC204	Chain kit w/(2) 10' chains & (2) End mount tong hangers

#### Note:

- 1. Consult factory for more options for wattage and board level lumens.
- 2. 20W Emergency battery backup available via use of two 14W emergency battery backups. Contact for more information.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

<sup>\*</sup>Programmable LED drivers allow custom configured wattages and corresponding lumens.



CATALOG#:
PROJECT:
TYPE:

# THL Series Commercial LED Highbay

#### **ORDERING GUIDE - 347-480V**

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration. Sample Part Number: THL-P-FR-20X24L-B-125-DHV-WH-30K

SERIES	MOUNTI	NG	DIFF	USER	WIDTH	X LENGTH	GEAR	WATTAGE*1		WATTAGE*1			DRIVER
THL	<b>P</b> P	endant	FR	Frosted	20X24L	23"W × 24"L	В	95	95 Watts 13,204 Lumens	DHV	347-480VAC		
								125	125 Watts 18,712 Lumens		0-10V Dimming		
								170	170 Watts 24,116 Lumens				
					20X48L	23"W × 48"L		190	190 Watts 26,272 Lumens				
								245	245 Watts 35,872 Lumens				
								285	285 Watts 41,296 Lumens				
								325	325 Watts 46,176 Lumens				
								375	375 Watts 52,544 Lumens				

FIN	IISH	С	СТ	OF	TIONS and EMERGENCY <sup>2</sup>
WH	White	30K	3000K	EM14	14W Emergency battery backup
		35K	3500K	EM20	20W Emergency battery backup
		40K	4000K	MDT4	ON/OFF Occupancy Sensor
		50K	5000K	MDB3	Low Mount 360° Bi-level with 0-10V
				PC120	120V Photo Cell
				PC277	277V Photo Cell
				CS08	8' Power Cord
				WP	6' 3 Wire Whip
				WP10	6' 4 Wire Whip
				HC101	Chain kit w/20' chain & (6) S Hooks
				HC204	Chain kit w/(2) 10' chains & (2) End mount tong hangers

#### Note:

- 1. Consult factory for more options for wattage and board level lumens.
- 2. 20W Emergency battery backup available via use of two 14W emergency battery backups. Contact for more information.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

<sup>\*</sup>Programmable LED drivers allow custom configured wattages and corresponding lumens.




CATALOG#:
PROJECT:
TYPE:

# THL Series Commercial LED Highbay

#### **PRODUCT DIMENSIONS**

Fixture Size	W	L	W <sub>H</sub>	L <sub>H</sub>
THLPFR20X24L	23.00"	24.02"	3.00"	21.97"
THLPFR20X48L	23.00"	48.02"	3.00"	45.97"

### Hanging Point Dimensions

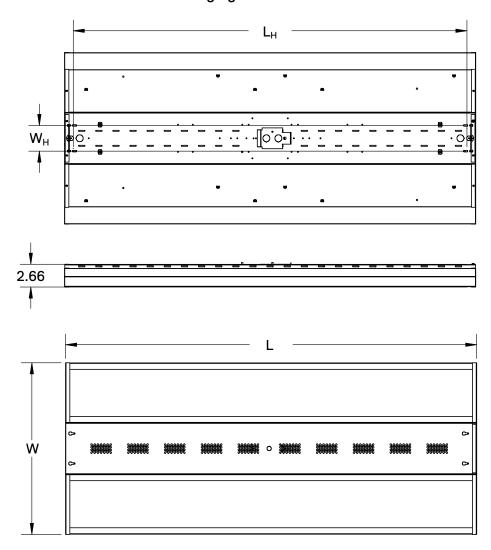



_	Α;	$\top$	Λ	1	$\cap$	0	44	
- (	, А		А	ᆫ	U	u	#	ı

PROJECT:

TYPE:

### THL Series Commercial LED Highbay

#### **DLC LISTED MODEL NUMBER**

ITEM NUMBER



THLPFR20X24LB105DMVWH30K[xxxxx] THLPFR20X24LB105DMVWH40K[xxxxx] THLPFR20X24LB105DMVWH50K[xxxxx] THLPFR20X24LB125DMVWH30K[xxxxx] THLPFR20X24LB125DMVWH40K[xxxxx] THLPFR20X24LB125DMVWH50K[xxxxx] THLPFR20X48LB140DMVWH40Koooo THLPFR20X24LB165DMVWH30K[xxxxx] THLPFR20X24LB165DMVWH40K[xxxxx1] THLPFR20X24LB165DMVWH50K[xxxxx] THLPFR20X48LB168DMVWH40Koooo THLPFR20X48LB210DMVWH30K[xxxxx] THLPFR20X48LB210DMVWH40K[xxxxx] THLPFR20X48LB210DMVWH50K[xxxxx] THLPFR20X48LB250DMVWH30K[xxxxx] THLPFR20X48LB250DMVWH40K[xxxxx] THLPFR20X48LB250DMVWH50K[xxxxx] THLPFR20X48LB285DMVWH30K[xxxxx] THLPFR20X48LB285DMVWH40K[xxxxx] THLPFR20X48LB285DMVWH50K[xxxxx] THLPFR20X48LB325DMVWH30K[xxxxx] THLPFR20X48LB325DMVWH40K[xxxxx] THLPFR20X48LB325DMVWH50K[xxxxx] THLPFR20X48LB360DMVWH30K[xxxxx] THLPFR20X48LB360DMVWH40K[xxxxx] THLPFR20X48LB360DMVWH50K[xxxxx]

THLPFR20X24LB125DHVWH30K[xxxxx] THLPFR20X24LB125DHVWH40K[xxxxx] THLPFR20X24LB125DHVWH50K[xxxxx] THLPFR20X24LB170DHVWH30K[xxxxx] THLPFR20X24LB170DHVWH40K[xxxxx] THLPFR20X24LB170DHVWH50K[xxxxx] THLPFR20X24LB95DHVWH30K[xxxxx] THLPFR20X24LB95DHVWH40K[xxxxx] THLPFR20X24LB95DHVWH50K[xxxxx] THLPFR20X48LB190DHVWH30K[xxxxx] THLPFR20X48LB190DHVWH40K[xxxxx] THLPFR20X48LB190DHVWH50K[xxxxx] THLPFR20X48LB245DHVWH30K[xxxxx] THLPFR20X48LB245DHVWH40K[xxxxx] THLPFR20X48LB245DHVWH50K[xxxxx] THLPFR20X48LB285DHVWH30K[xxxxx] THLPFR20X48LB285DHVWH40K[xxxxx] THLPFR20X48LB285DHVWH50K[xxxxx] THLPFR20X48LB325DHVWH30K[xxxxx] THLPFR20X48LB325DHVWH40K[xxxxx1] THLPFR20X48LB325DHVWH50K[xxxxx] THLPFR20X48LB375DHVWH30K[xxxxx] THLPFR20X48LB375DHVWH40K[xxxxx] THLPFR20X48LB375DHVWH50K[xxxxx]

ITEM NUMBER