



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series WPU

Wall Puff Linear Fixture

Contemporary narrow white cloud 1 or 2 light vanity has rounded corners and can be mounted vertically or horizontally. Diffuser fully encloses the fixture providing a clean appearance. Power supply connections can be made in a 2" x 4" handy-box (not included) or made inside the housing.

CONSTRUCTION

The wiring channel is formed from 22 gauge steel and is provided with standard mounting holes and wiring access. Housing is finished in lighting grade baked gloss white enamel paint.

LAMP

1 or 2 lamp positions - T8 or CFL

DIFFUSER


Diffuser is vacuum formed 0.125" thick crepe matte texture. Diffuser is secured with a screw on each end.

ELECTRICAL

This unit can be ordered in the following options: with UL Listed instant start, electronic high power factor ballast, 120-277 Universal 50/60Hz AC (MV suffix) S designates normal power factor, 120V, residential grade ballast. Consult for other ballast options.

TYPICAL OPTIONS & ACCESSORIES

Emergency ballasts, cord sets. Contact factory for more details.

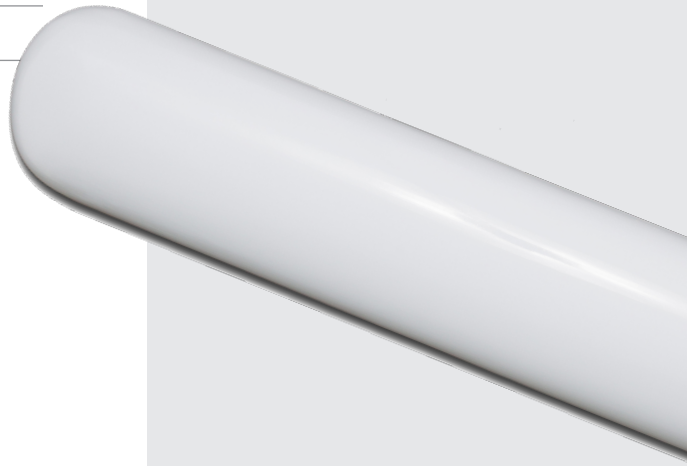

DIMENSIONS


- WPU232 - 6.0" x 51.0" x 2.75"
- WPU225 - 6.0" x 39.0" x 2.75"
- WPU217 - 6.0" x 27.0" x 2.75"
- WPU113 - 6.5" x 14.0" x 3.75"

FEATURES & BENEFITS

- Available in 14", 27", 39" and 51" length; 1 or 2 lamp positions
- Contemporary and sleek bar
- May be mounted vertically or horizontally
- Designed for commercial or residential use



DRAWINGS & IMAGES

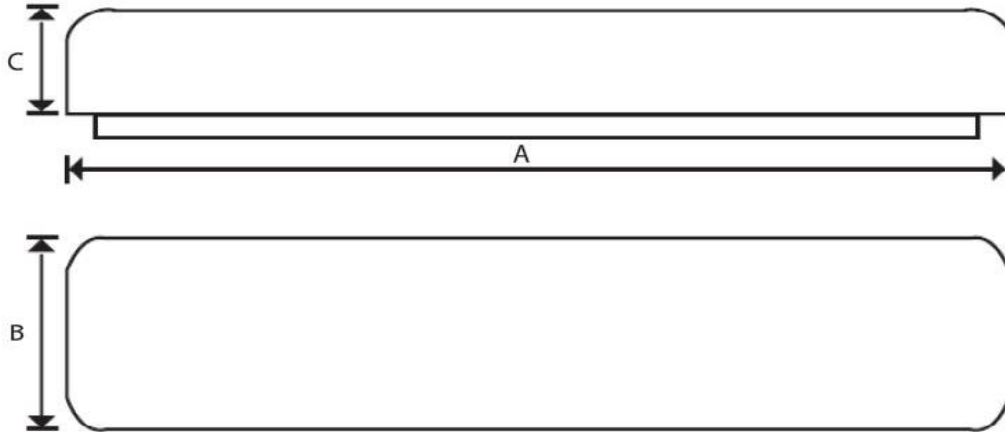

SERIES	A	B	C
WPU213	14"	6.5"	3.75"
WPU217	27"	6.0"	2.75"
WPU225	39"	6.0"	2.75"
WPU232	51"	6.0"	2.75"

ORDER INFORMATION

SERIES	LAMP	LAMP TYPE	BALLAST & VOLTAGE	OPTIONS
WPU	1 1 Lamp	13 Quad 4-Pin	MV Electronic, Multivolt (120-277)	EM Emergency ballast, 500 Lumens EM14 Emergency ballast, 1400 Lumens
	2 2 Lamp Lamp not included	17 25" T8	H120 Electronic, 120V Hi-Lume (2)	
		26 36" T8	H277 Electronic, 277V Hi-Lume (2)	
		32 48" T8	HMV Electronic, Multivolt, Hi-Lume (2)	
			S Residential Electric 120V	

1) Custom louvers available in any cell configuration. Consult factory for additional information
2) Hi-Lume and Lo-Lume ballasts available for T8 lamps only