
HBC-Pendant Installation Instructions Overview



WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting www.saylite.com/warnings.

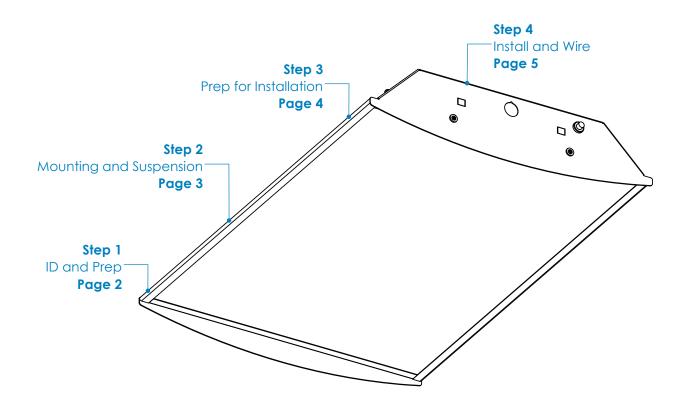

Your particular build may vary.

2020© Saylite | 2055 Luna Road, Suite 142 Carrollton, Texas 75006 | www.saylite.com

HBC-Pendant Installation Instructions Step 1 - Identification and Preparation

Saylite Texas Fluorescents Reinvented

A. Identify Fixtures

SayliteLED Texas Fluorescents Reinvented PART# HBCFRxxXxxLBxxDMVxxK			
VOLTAGE: 120-277, 50/60HZ CCT: XXXX WATTAGE: XX MAX DATE CODE: XX/XX/XX FLUX: XXXX LUMENS TYPE: XX			
	Screwdrivers	Pliers	Safety Glasses
 Use labels found on the box and inside the fixture bodies to identify bodies. NOTE: Locations of labels can vary. Remove all fixtures from their boxes. Organize fixtures based on their labels at the install location. 	 Always use proper so Tools shown are reconneeded may vary b 		ard install. Tools

B. Tools Needed

Kitted Hardware

- Saylite has provided the items listed here, with their Saylite part numbers listed. These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.

HBC-Pendant Installation Instructions Step 2 - Mounting and Suspension

Mounting

Drywall or other hard surfaces - GT310/315 Hanging Kit*


- Install hanging kits at suspension locations.
- Ensure hanging kits are secure.
- Prepare fixture for mounting.

Other hard surfaces include: wood, sheet metal panels, steel beams, concrete or masonry. Use hardware appropriate for each surface and material type.

Suspension Locations

X = Suspension Dimensions

Refer to Assembly Drawings and building plans to determine exact mounting, suspension points, and power feed locations.

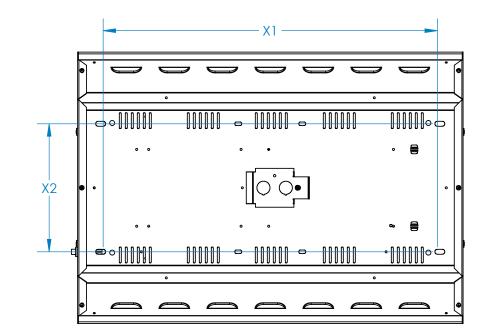





HBC-Pendant Installation Instructions Step 3 - Prepare for Mounting



A. Install Hanging Kits

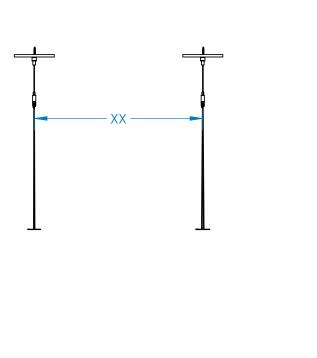

- Install the hanging kits to the ceiling at the desired mounting locations.
- Ensure that hanging kits are properly secured.
- Refer to hanging kit installation guide for more information.
- Use a flat head screwdriver to pry up and remove desired knockout on access cover.
- Use a Philip's head screwdriver to uninstall the screw securing the access cover and remove the access cover from the fixture.

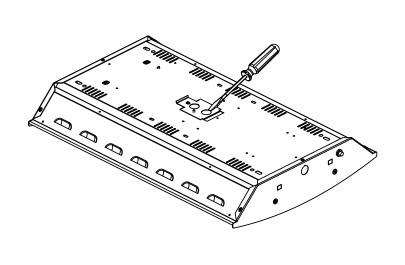


B. Open Access Cover

HBC-Pendant Installation Instructions Step 4 - Install and Wire Fixture



A. Install Fixture to Hanging Kits



B. Connect Fixture Wiring



WIRING LEGEND			
BLACK	HOT	Line Voltage	
WHITE	NEUTRAL	Line Voltage	
GREEN	GROUND		
GRAY	DIMMING	0-10V DC	
VIOLET	DIMMING	0-10V DC	

- Wire fixtures to the incoming power supply using the provided quick • Install the fixture to the hanging cables. disconnect clip as shown. • Rotate the toggle paddles of the hanging kits as parallel as • For dimming option, refer to wiring legend above. possible to the hanging cables to insert to the oblongs on the • Use UL approved connectors only. Follow all local, state and national codes. Replace the access cover removed in Step 3. fixture.
- Adjust cable lengths to level the fixture as needed.
- Installation is now complete.