


SBC-Surface Mount Installation Instructions

Overview

WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting www.saylite.com/warnings.

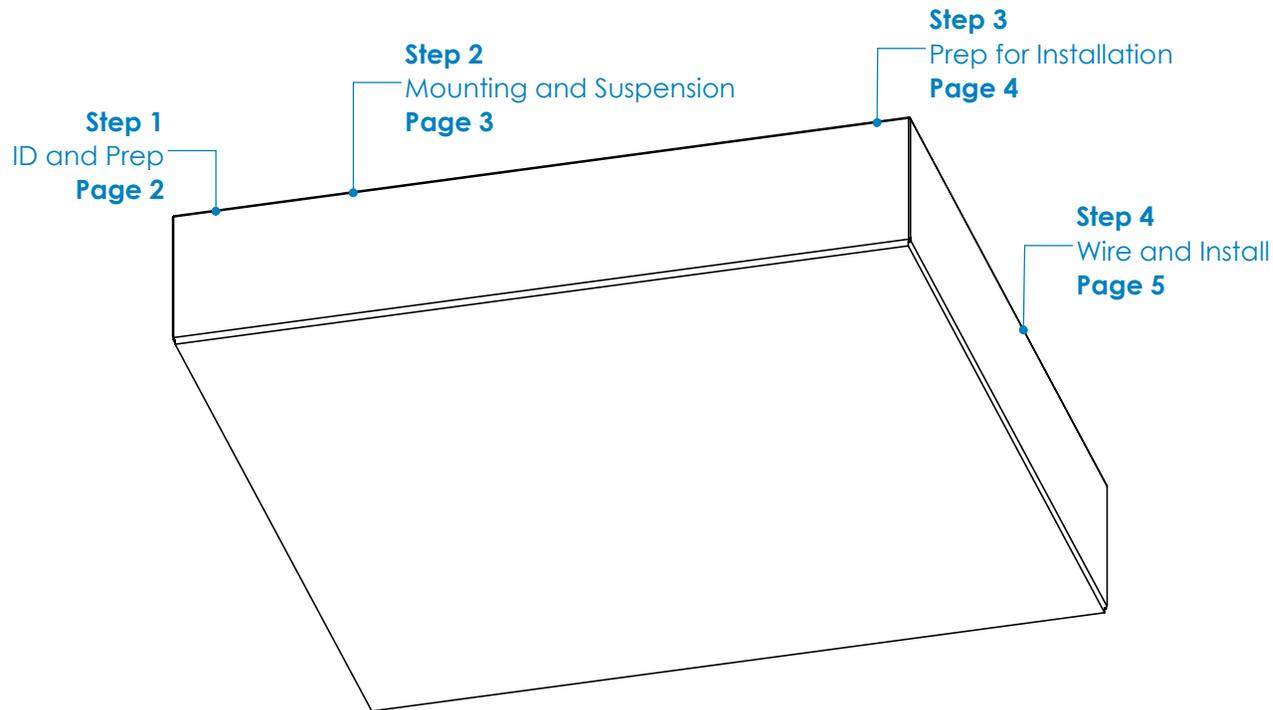


Your particular build may vary.

2020© Saylite | 2055 Luna Road, Suite 142, Carrollton, TX 76005 | www.saylite.com


SBC-Surface Mount Installation Instructions

Step 1 - Identification and Preparation


A. Identify Fixtures

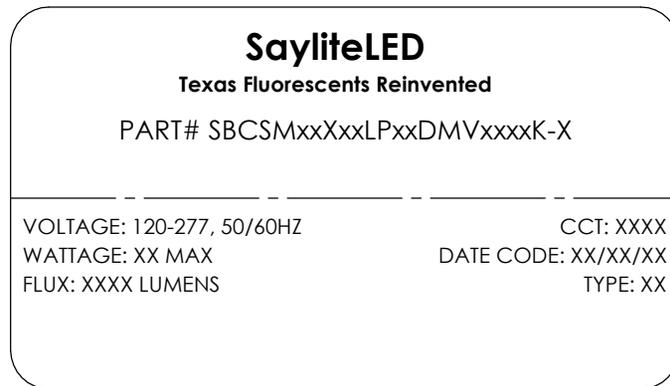


B. Tools Needed



Screwdrivers



Drill



Safety Glasses

- Use labels found on the box and inside the fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.

Kitted Hardware

- Saylite has provided the items listed here, with their Saylite part numbers listed. These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.

SBC-Surface Mount Installation Instructions

Step 2 - Mounting and Suspension

Mounting Options

Drywall or other hard surfaces - Anchored Screws


- Install anchors at mounting locations.
- Ensure anchors are secure.
- Prepare fixture for mounting.

Other hard surfaces include: wood, sheet metal panels, steel beams, concrete or masonry. Use hardware appropriate for each surface and material type.

Suspension Locations

X = Suspension Dimensions


Refer to Assembly Drawings and building plans to determine exact mounting, suspension points, and power feed locations.

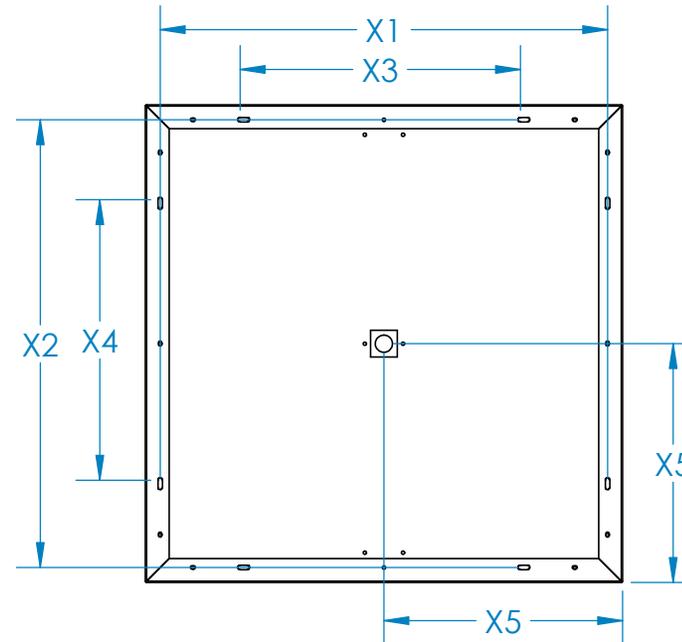

SBC-Surface Mount Installation Instructions


Step 3 - Prepare for Installation

A. Drill Hole for Wiring

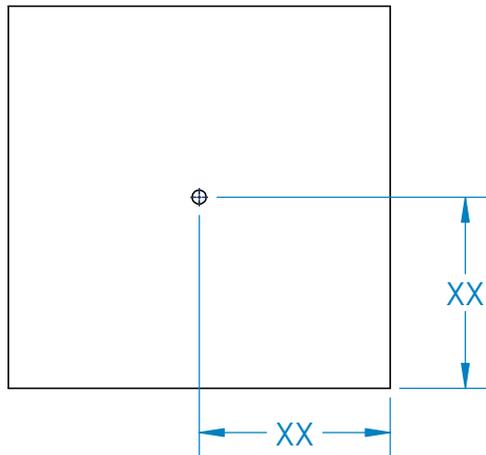

- Drill a 7/8" hole or larger for wiring to pass thru, a junction box should be mounted behind the mounting surface.
- The hole must be centered on the fixture.

B. Install Anchors

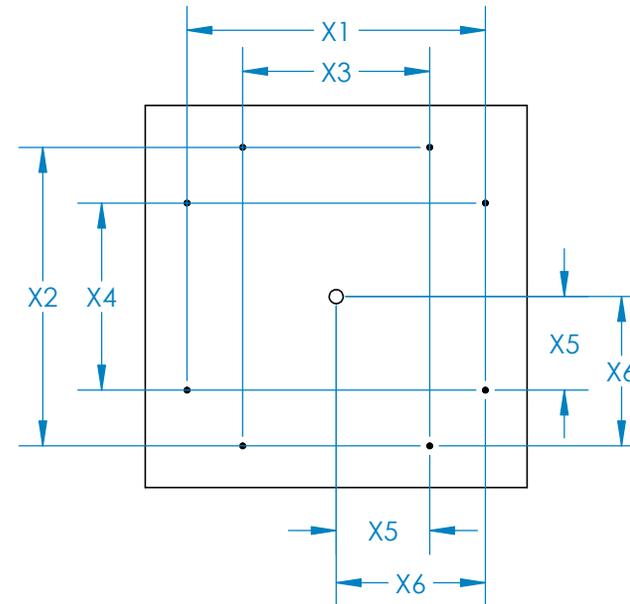

- Install the screw anchors at the designated mounting locations.
- Verify the dimensions of the mounting locations prior to installing the anchors.


SBC-Surface Mount Installation Instructions

Step 4 - Wire and Install the Fixture



Texas Fluorescents Reinvented


A. Connect Fixture Wiring

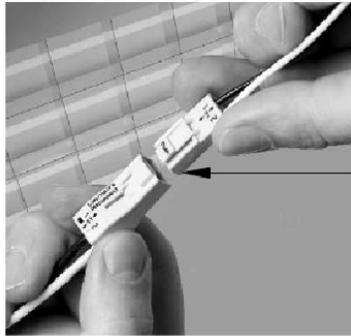

WIRING LEGEND		
BLACK	HOT	Line Voltage
WHITE	NEUTRAL	Line Voltage
GREEN	GROUND	
GRAY	DIMMING	0-10V DC
VIOLET	DIMMING	0-10V DC

- Wire fixture to the incoming power supply using the provided quick disconnect clip as shown.
- For dimming option, refer to wiring legend above.
- Use UL approved connectors only. Follow all local, state and national codes.
- Fixture installation is now complete.

B. Install the Fixture

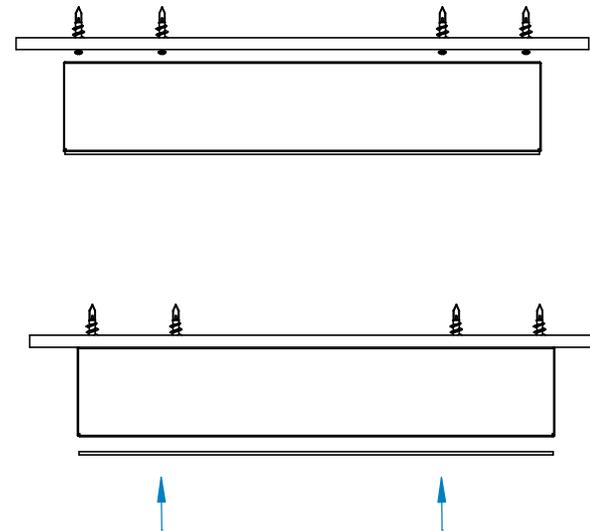

- Install the fixture to the ceiling by using the screws and screw anchors (not provided) to the mounting surface.
- Ensure all screws are properly tightened and the fixture is secure.
- Install the lens to the fixture.
- Installation is now complete.