

# 8RB Series

## 96 in. Ballast Cover Retrofit Kit

### FEATURES

#### INTENDED USE

Ballast retrofit kit, 96 in. long, converts an existing strip to carry standard lamps. Material is die-formed 22 gauge steel, with high reflectance baked white enamel finish. TEK screws are provided to attach retrofit ballast cover to an existing channel. Ballast and mounting plate may be removed for service without disturbing 96 in. cover.



#### KIT INCLUDES

- (1) 96 in. ballast cover with lamp holder cut outs
- (1) Ballast mounting plate
- Short lamp holders (style and quantity as specified).
- (8) #8 x 3/8" TEK mounting screws

### ORDERING INFORMATION

<b>8RB</b>
<b>Series</b>
<b>8RB</b> 96 in. Ballast Cover Retrofit Kit

<b>42</b>
<b>Width Code</b>
<b>42</b> 4.25 inches, nom. <b>50</b> 5.0 inches, nom.

<b>2x2</b>
<b>Lamp Count</b>
<b>1x2</b> Two lamps <b>2x2</b> Four lamps

<b>T8</b>
<b>Lamp Type</b>
<b>T8</b> T8 lamp


Example 8RB422X2T8L10

<b>L10</b>
<b>Lamp Holder Wiring</b>
<b>L10 [1]</b> Shunted <b>L11 [1]</b> Un-shunted.

[1] Shunted lamp holders (L10) are suitable for instant start ballasts, un-shunted (L11) for rapid or pro start ballast



T8 Style lamp holders only available for 8 ft. kit

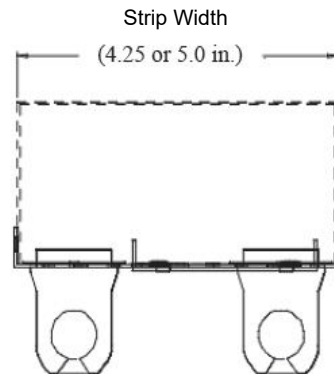

Two (2x2) lamp positions shown

Catalog Number:
Notes: