

EZXTEU-RC

Remote Capable LED Exit Sign



STANDARD



OPTIONAL

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Offers 11W of remote capacity.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and remote lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- HTR: Optional internal heater for cold temperature applications.
- cULus: Units tested to meet requirements of CAN/CSA-c22.2 No. 141-02 standard for unit equipment.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (20°C – 50°C).

DIMENSIONS

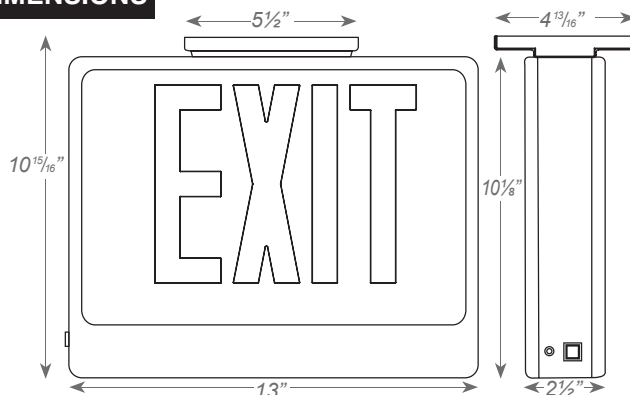

ORDERING INFORMATION

Sample Part Number: **EZXTEU-1-R-W-EM-RC**

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY			OPTIONS		
				EM	Battery Backup	RC	Remote Capable Standard	SDT	Self-diagnostics
EZXTEU-RC	1	Single Face	R Red	W White					
	2	Universal Single/Double	G Green	B Black				HTR	Internal Heater
								cULus	cULus Listed

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.

CATALOG#: _____
PROJECT: _____
TYPE: _____

EZXTEU-RC

Remote Capable LED Exit Sign

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EZXTEU-RC/RC-SDT	10	10	0.10	0.05

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V	
EZXTEU-RC/RC-SDT	6V	11W			X	X	X		X		X		X		X