

CATALOG#:

PROJECT:

TYPE:



LED Recessed Flat Panel

The refreshing SBR Series offers luxurious lighting in a slim, austere design. Available in 1x4, 2x2 and 2x4 in multiple color temperatures and dimmable with 0 to 10 Volt dimming. The SBR is designed for T-Bar grid mounting and has a ballast box on top of the fixture. The panel has an unobstrusive white edge. These panels are an ideal choice for many applications including offices, circulation spaces, retail and now popular in residential kitchens remodeled to give a skylight appearance.

CONSTRUCTION

Housing is white aluminum that is sealed and Non-IC type fixture. Lens is evenly diffused frosted material. The driver is a Class 2 compliant design, featuring low voltage, limited power and is capable of 0-10V dimming as standard. Available in 40, 48 & 95 input watts. Fixture is 80CRI minimum, multiple color temperatures, sizes and wattages are available. 5 year limited system warranty. Listed by and bears $_{\rm c}$ ULus label.

TYPICAL OPTIONS & ACCESSORIES

Emergency battery backup, whips and frame kits.

DIMENSIONS

1x4- 47.50"L x 11.78"W x 4.688"H 2x2- 23.75"L x 23.75"W x 4.688"H 2x4- 47.688"L x 23.95"W x 4.688"H

FEATURES & BENEFITS

- Ultra thin LED panel light made from high-grade aluminum
- 1" deep recessed lens/fascia
- · Custom finish colors available
- Rated at 50,000 hrs of L70 LED life
- · CRI >80
- 0-10 Volt dimmable 120-277V
- · High efficacy and UV and IR Free
- PF >0.99











CATALOG#:		
PROJECT:		
TYPE:		

Series SBR
LED Recessed Flat Panel

ORDER INFORMATION

SERIES	DIFFUSE	ER	WIDTH	X LENGTH	GEAR		WATTAGE*1	D	RIVER	FI	NISH ²	(ССТ
SBR	FR Fro	osted	12X48	12"W x 48"L	LP	D48	48 Watts 3,200 Lumens	DMV	0-10V Dimming	WH BK	White Black	30K 40K 50K	3000K 4000K 5000K
			24X24	24"W x 24"L		D40	40 Watts 3,100 Lumens			SL	Silver		
			24X48	24"W × 48"L		D80	80 Watts 6,400 Lumens						

EMERGENCY³

EM14

14W Emergency battery backup

Note:

- 1. Consult factory for more options for wattage and board level lumens. Lumen values shown are for blank pattern, other patterns will reduce lumen output. Consult factory for more information on percentage output lost for desired pattern.
- 2. Standard fascia finishes are White, Black, and Silver. Please consult factory for more information and pricing on custom color options.
- 3. Emergency backup test button mounted on the outside of the fixture body.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

^{*}Programmable LED drivers allow custom configured wattages and corresponding lumens.





CATALOG#:		
PROJECT:		

Series SBR LED Recessed Flat Panel


TYPE:

DRAWINGS & IMAGES

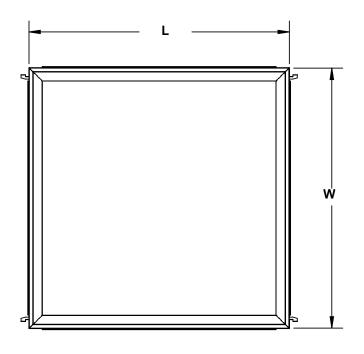

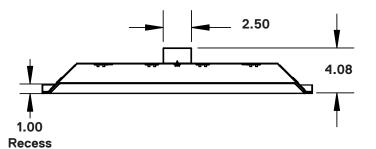

Depth

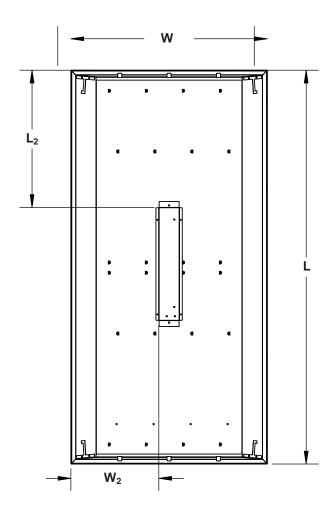

Fixture Size	W	L	W_2	L ₂
12X48	11.78"	47.5"	4.7"	16.7"
24X24	23.75"	23.75"	10.7"	4.7"
24X48	23.75"	47.5"	10.7"	16.7"