

JOB NAME: CAT#: TYPE:

APPLICATIONS


Commercial grade shallow surface mounted vandal resistant LED fixture. For use in high abuse indoor applications such as schools and public buildings and any area where security is the primary consideration.


Housing is die-formed 20 gauge cold rolled steel. Finish is high reflectance baked white enamel. Injection molded, thick walled, clear prismatic diffuser is manufactured from high impact UV treated polycarbonate. Diffuser is held in place and secured with tamperproof stainless steel screws. Mounts over electrical junction box. Mounting holes are provided.

FEATURES & BENEFITS

- · The ultimate in vandal resistant enclosed security fixtures
- Virtually indestructible UV stabilized lens is .177" clear polycarbonate
- Lens has a pyramidal prism design on bottom and vertical perimeter rib for maximum light control and efficiency
- Available in lengths from 24 to 48 inches (2', 4' lengths)
- Fully gasketed to provide protection against dust, dirt, insects, moisture and other foreign dust particles
- · Tamperproof screws are standard
- · Every fixture individually tested
- ETL listed

DIMENSIONS

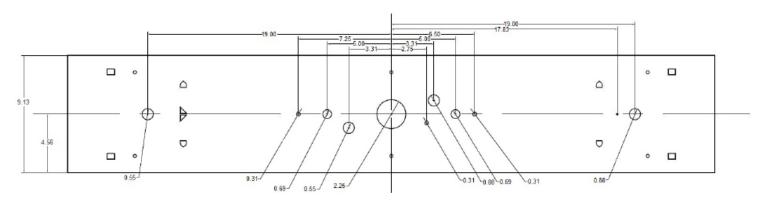

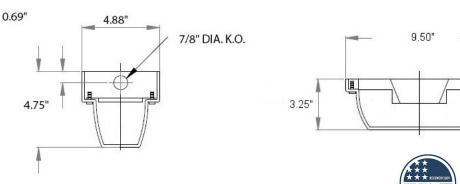

Dimensions and specifications subject to change without notice.







SVP LED Surface Vandal Proof Unit

JOB NAME: CAT#: TYPE:

ORDERING

EXAMPLE: SVP 24 LED 20 DMV 40

SVP LED

1. SERIES 2. WIDTH		3. LENGTH		4. GEAR	R 5. WATTAGE/LUMENS		6. DRIVER*		7. COLOR TEMP			
SVP	Blank N	9.5" 4.8" (48 length only)	24	27" nominal (not available in N width)	LED	20 24		vide only) 2000 Lumens 2400 Lumens	DMV	0-10V Dimming 120-277VAC Multivolt	40 50	
			48	51" nominal		28	28 Watts	2800 Lumens	*Consult for Traic and Step Dimming Options			
						30	30 Watts	3000 Lumens				
				<u>4 ft.</u>								
						23	23 Watts	3160 Lumens				
						28	28 Watts	2980 Lumens				
						35	35 Watts	4500 Lumens				
						48	48 Watts	5570 Lumens				
						57	57 Watts	6790 Lumens				
						72	72 Watts	7200 Lumens				
							4 ft N	<u>larrow</u>				
						15	15 Watts 1650 Lumens					
						20	20 Watts	2200 Lumens				
						24	24 Watts	2400 Lumens				
						28	28 Watts	2800 Lumens				
						30	30 Watts	3000 Lumens				







