

APPLICATIONS

This line of open slimline fixtures provides the most economical lighting for industrial and commercial applications such as factories, warehouses, workshops, utility areas and public buildings.

FEATURES & BENEFITS

- ◆ Snap-on components for easy assembly and maintenance
- ◆ Combination end plate/coupler can be used for continuous row mounting
- ◆ Available in lengths from 48-96 inches - (4', 6', 8' lengths)
- ◆ Surface, stem or chain mountable
- ◆ Uses T8 or T12 lamps
- ◆ UL Listed for damp location

SPECIFICATIONS

Housing and ends are die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Snap-in end plates can serve as joiners for continuous row mounting. Snap-on ballast covers are two piece for simple installation and maintenance. Knockouts are provided for flexible conduit attachment and stem mounting. Mounting holes are provided. Listed by and bears **UL** label.



ORDERING DATA

EXAMPLE: 80 2 96 MV B1

Series	# of Lamps	Lamp Size	Ballast Type	Options	
80	1 2	1 Lamp 2 Lamp	72 T8/T8HO/T12HO 72" 96 T8/T8HO/T12HO 96"	MV Multivolt 120-277V 120 120V 277 277V MV Multivolt 120-277V LED** Wired 1 end hot for T8 LED tubes LED2** Wired 2 ends hot for T8 LED tubes	B1 Battery backup 1 lamp, 500 lumen B2 Battery backup 2 lamp, 700 lumen 11 Dual ballast 1 lamp + 1 lamp RIF Radio interference filter


**** Assembled with no ballast, made for UL Listed, self ballasted retrofit LED lamps**

*See chart below for whip & cord ordering options
**Call for additional options

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK - Black	(Blank) 120-277V	15 - 15 Amps
CS - Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	

DIMENSIONS

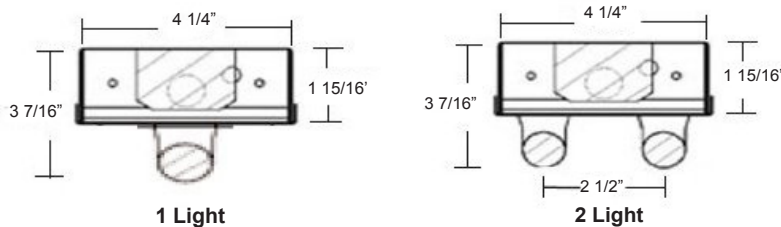

Dimensions and specifications subject to change without notice.