



JOB NAME:

CAT#:

TYPE:

ILLUMINATION

- Adjustable long lasting, efficient ultra bright white LED lamp heads
- One, 0.5 watt white LED per lamp head
- Unique all inclusive lamp, reflector, and lens assembly
- Long-lasting, energy efficient red or green LED exit sign illumination

ELECTRICAL

- Dual 120/277 voltage standard/ Optional 120V/230V available
- Unique bi-color LED indicator light alerts occupant on battery condition (green-normal, red-check battery)
- 3.6V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to the lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



MOUNTING

- EZ-snap thermoplastic mounting canopy included - provides top or end mount
- Universal knockout pattern on back plate for wall mount


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish
- Aesthetically pleasing, curved face rounded corner design
- EZ snap-out chevron directional indicators

WARRANTY/LISTING

- One year warranty on all electronics and housing. Battery prorated for one year
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for damp locations (0°C-40°C)
- Certified to CEC under Title 20 regulations

DIMENSIONS

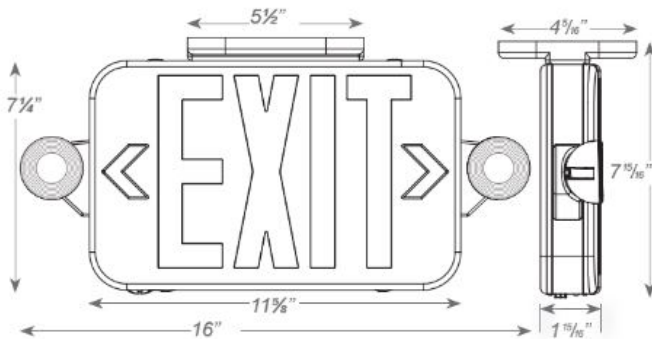

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: CEU 3 R W RC

CEU

1. MODEL	2. # OF FACES	3. LETTER COLOR	4. HOUSING COLOR	5. REMOTE CAPACITY (O) ¹	6. VOLTAGE (O) ¹
CEU	3 Universal/ Single/Double Face	R Red G Green	W White B Black	RC Remote Capacity	SPV 120/230 Volt 50/60Hz

Notes:

¹(O) is optional

Dimensions and specifications subject to change without notice.

