



JOB NAME:

CAT#:

TYPE:

ILLUMINATION

- Two fully adjustable, semi-recessed ultra bright, 7.2 watt MR-16 halogen lamp heads standard
- High performance MR-16 halogen lamps with smooth metallized reflector and glass lens for optimal light distribution

ELECTRICAL

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V maintenance free, rechargeable sealed lead acid battery
- Internal solid-state transfer switch automatically connects the internal battery to the lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



MOUNTING

- Universal knockout pattern on back plate for wall mount. Snaps into place making internal electrical connections


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for 2 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for wet locations (20°C-40°C)

DIMENSIONS

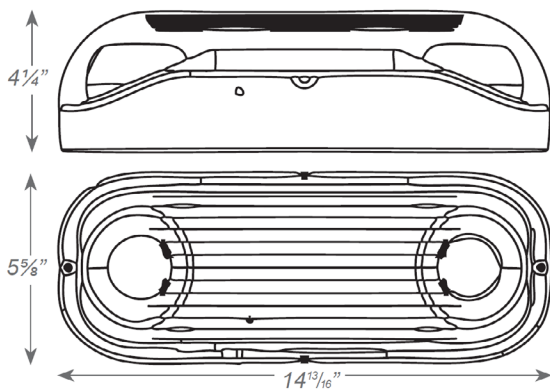

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: RMR-16-WP

RMR-16-WP

1. MODEL	2. HOUSING COLOR	3. WEATHER	4. HEATER (O) ¹	5. LAMPING (O) ¹	6. LISTING (O) ¹
RMR-16-WP	(blank) Gray B Black	WP Wet Location	HTR Internal Heater CW Internal Heater With Battery Blanket	LED 3.3W High Lumen White LED Lamps PLED 5.0W High Lumen White LED Lamps	CEC Title 20 Compliant

Notes:

¹(O) is optional

Dimensions and specifications subject to change without notice.

