




JOB NAME:

CAT#:

TYPE:

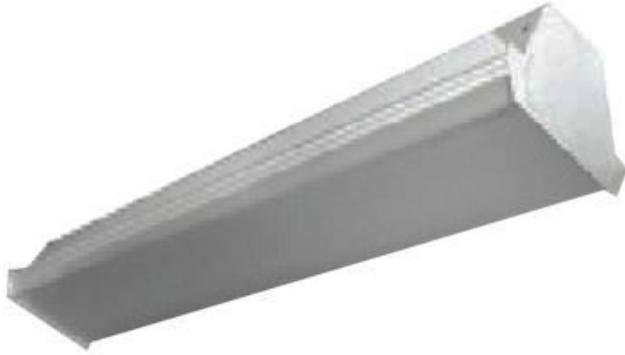

Dimensions and specifications subject to change without notice.

The most economical, practical, and user friendly series of LED fixtures with energy savings, quality of light, long life and hassle-free maintenance/ EZLED fixtures are UL listed with the latest LED T8 bypass lamps. These fixtures provide over 44% energy savings over comparable fluorescent fixtures utilizing less expensive fixtures than the fluorescent version (no ballast required). They also provide the flexibility to change the wattage and color temperature at any time. Are you concerned about maintenance with an LED array and driver fixture? EZLED resolves that issue by utilizing a self-contained LED lamp that fits into your fixture just like the classic fluorescent tube. The fixture performance will evolve over time with the evolution of the T8 LED lamp technology, and our five-year warranty guarantees a reliable, high quality product.

Lamp Specifications

Our EZLED fixtures come standard with SaveGreen T8 LED lamps. They are available in 2 or 4 foot sizes in different wattage, lumens, and color temperature options (see lamp options and specifications at www.savegreenlighting.com).

- $L_{70} > 50,000$ hrs.
- Operating temperature: -20°C to 50°C
- Color Temperature: 3500K, 4000K, 5000K
- G13 pins (same as fluorescent linear T8 bipin)
- AC100-277V
- Integral driver (non-isolated) eliminates the need for external driver or ballast
- Environmentally friendly, no mercury used
- UL Classified
- Min CRI 80
- 5 year warranty

Optional Dimming

The 4 foot lamps are available with a dimming option. Specially designed dimming lamps require an external driver that runs 1 or 2 lamps (more than 2 lamps require multiple external drivers).

Emergency Options


The standard EZLED lamps require an inverter or an all-in-one emergency kit that includes LED array, battery, and driver. Dimmable T8 LED with external driver works with standard LED EM in it.

With 1, 2 or 3 lamps in cross-section, the ability to add a reflector and a clear acrylic #8 pattern lens, this wrap around is suitable for a wide variety of applications. A full wireway allows exact lamp spacing and more uniform light distribution.

CONSTRUCTION

Housing is 22 gauge baked white enamel cold rolled steel body and ends. 20 gauge can be supplied. 20 gauge socket bars are standard. Wiring knockouts are provided on back and end of housing. Lens is held with left and shift method. Premium, full specular reflectors are available as an option to increase efficiency or modify lighting distribution.

SIZE: W x L x H in inches
8.75"W x 48.0"L x 4.40"H

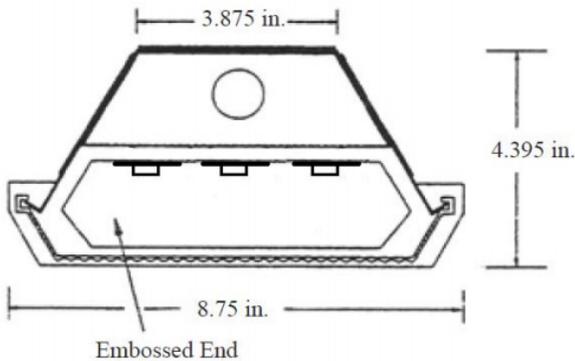

Note: In order for UL safety certification to be valid, only approved lamps may be installed in the fixture and must be shipped with the fixture from the factory.



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 774 1 32 LEDL15W 40 JAM

774

1. SERIES	2. # OF LAMPS	3. LAMP TYPE	4. LAMP WATTAGE	5. COLOR TEMP	6. LAMP BRAND	
774	1 1 Lamp	32 48" T8	T8 Options		30 3000K	Blank House Brand (Savegreen)
		32TAN 96" T8	LEDL12W 12.5 Watts 1750 Lumens	35 3500K		
	2 2 Lamps	54 46" T5HO	LEDL15W 15 Watts 1740 Lumens	40 4000K	KEY Keystone	
			LEDL18W 18 Watts 2500 Lumens	50 5000K		
	3 3 Lamps		T5 Options			JAM James Brand (Special Order)
			LEDL25W 25 Watts 3300 Lumens			

Dimensions and specifications subject to change without notice.

Note: In order for UL safety certification to be valid, only approved lamps may be installed in the fixture and must be shipped with the fixture from the factory.